

Table of Contents

Disclaimers.....	ii
Safety Precautions	iii
Classification.....	iii
General Cleaning Tips	iv
Scrap Computer Recycling.....	v
CHAPTER 1 INTRODUCTION	1
1.1 General Description.....	1
1.2 System Specifications	2
1.2.1 CPU	2
1.2.2 I/O System	2
1.2.3 System Specification.....	3
1.2.4 Driver CD Content.....	3
1.3 Dimensions	4
1.3.1 System Dimension.....	4
1.3.2 Wall mount Bracket Dimension.....	5
1.4 I/O Outlets	6
1.5 Packing List.....	8
1.6 Model List.....	8
CHAPTER 2 HARDWARE INSTALLATION.....	9
2.1 Installing the Memory module.....	9
2.2 Installing the 2.5" SATA HDD/SSD.....	11
2.3 Installing the Express Mini Card.....	14
2.4 Installing the optional 8-CH DIO kit	16
CHAPTER 3 JUMPER SETTING & CONNECTOR.....	19
3.1 SBC layout.....	19
3.2 Jumper Setting Summary.....	21
3.2.1 Restore BIOS Optimal Defaults (JP2)	21
3.3 Connectors	22
3.3.1 DC Phoenix Power In Connector.....	23
3.3.2 COM1~COM4 Serial Port Connector	23
3.3.3 VGA Connector	24
3.3.4 HDMI Connector.....	24
3.3.5 LAN Connector (LAN1, LAN2).....	25
3.3.6 ATX Power ON/OFF Button.....	25
3.3.7 Reset Button.....	25
3.3.8 Remote Power Switch Connector	25
3.3.9 AT/ATX Switch.....	26
3.3.10 USB 2.0 Connector	26
3.3.11 USB 3.0 Connector	26
3.3.12 Audio Connector	27
3.3.13 Option 8-CH DI/DO Connector	27
3.3.14 SATA Connector	27
3.3.15 SATA Power Connector.....	28
3.3.16 SIM Card Slot (SCN15).....	28

3.3.17 Full-Size PCI Express Mini Card Slot (SCN13 & SCN16).....	29
CHAPTER 4 BIOS SETUP UTILITY	31
4.1 Starting	31
4.2 Navigation Keys	31
4.3 Main Menu	32
4.4 Advanced Menu.....	33
4.5 Chipset Menu	46
4.6 Security Menu	49
4.7 Boot Menu	50
4.8 Save & Exit Menu	51
APPENDIX A WATCHDOG TIMER.....	53
About Watchdog Timer	53
How to Use Watchdog Timer	53

CHAPTER 1

INTRODUCTION

This chapter contains general information and detailed specifications of the
The Chapter 1 includes the following sections:

- General Description
- System Specification
- Dimensions
- I/O Outlets
- Packing List
- Model List

1.1 General Description

is an embedded system that supports onboard Intel® Celeron® N3150 Quad Core 2.08 GHz SoC onboard with integrated HD graphics to provide Windows 10, Windows 8.1, Windows 8 Embedded, Windows 7 Embedded or Linux, suitable for the most endurable operation. It features fan-less design with full feature I/O, one 204-pin unbuffered SODIMM socket for singe channel DDR3L-1333/1600 MHz memory, and enhanced system dependability by built-in Watchdog Timer.

➤ **Features**

1. Intel® Celeron N3150 Quad Core SoC, 1.60GHz - 2.08GHz Burst
2. Maximum to 8GB DDR3L-1333/1600 memory
3. Ultra slim and compact design
4. VGA & HDMI for display output
5. Supports 3 USB 3.0 & 1 USB 2.0 ports
6. Supports 1 RS-232/422/485 and 3 RS-232
7. Supports dual 10/100/1000Mbps Ethernet ports
8. One 2.5" SATA HDD drive bay (Maximum 15mm height)
9. Two Full-Size Mini PCI Express Mini Card w/mSATA supported
10. One SIM slot
11. Optional 8-CH Programmable DI/DO
12. Watchdog timer
13. Wide temperature: -20°C~60°C supported (with W.T. SSD & Memory)
14. 9 ~36VDC Wide range power input

➤ **Reliable and Stable Design**

adopts the advanced cooling system and supporting wide operating temperature with fan-less design, which makes it especially suitable in harsh environments, best for industrial automation, digital signage and gaming application.

➤ **Embedded O.S. Supported**

The not only supports Windows 10, Windows 8.1, but also supports embedded OS, such as Windows 8 Embedded, Windows 7 Embedded, WinCE and Linux.

➤ **Various Storage devices supported**

For storage device, the supports one 2.5" SATA storage drive bay and mSATA option supported.

1.2 System Specifications

1.2.1 CPU

- **CPU**
 - Intel® Celeron N3150 Quad Core SoC, 1.60GHz-2.08GHz Burst .
- **Integrated Graphics**
 - Intel® Gen8 graphics: up to 12 EUs inside.
 - Intel® Graphics DX 11, OGL3.2.
- **BIOS**
 - American Megatrends Inc. UEFI (Unified Extensible Firmware Interface) BIOS.
 - 16Mbit SPI Flash, DMI, Plug and Play.
 - PXE Ethernet Boot ROM.
- **System Memory**
 - One 204-pin unbuffered **DDR3L** SO-DIMM socket.
 - Maximum to 8GB DDR3L 1333/1600 MHz memory.

1.2.2 I/O System

- One VGA DB15 connector, up to 1600 x 1200 @60Hz
- One HDMI with max. resolution up to 4K x 2K (3840x2160) @ 30Hz
- Two Audio connector (Mic-IN, Line-OUT), HD audio compliant with Realtek ALC662
- Two RJ-45 10/100/1000Base-T Ethernet - i211AT w/Wake-on-LAN & PXE Boot ROM
- Three USB 3.0 & One USB 2.0portss
- Four COM DB9 connectors, COM1 for RS-232/422/485, COM2-4 for RS-232
- Optional 8-CH programmable DI/DO via optional port, default COM4
- One phoenix type connector for 9~36VDC power input
- One SIM slot
- Two PCI Express Mini Card Slots
- Two Indicators (Green LED: System Power, Yellow LED: HDD Active)
- Three Antenna Opening
- Power button
- Reset button
- AT/ATX mode quick switch
- Remote power switch

1.2.3 System Specification

- **Watchdog Timer**
 - 1~255 seconds or minutes; up to 255 levels.
- **Power Supply**
 - 9~36VDC Wide range power input
- **Operation Temperature**
 - -20°C ~ 60°C (-4 °F ~ 140°F), N3150 with W.T. SSD/DRAM
 - -20°C ~ 50°C (-4 °F ~ 122°F), N3150 by burst mode, with W.T. SSD/DRAM
- **Storage Temperature**
 - -40°C ~ 80°C (-40 °F ~ 176°F)
- **Humidity**
 - 10% ~ 95% (non-condensation)
- **Vibration Endurance**
 - 3Grm w/ SSD™ (5-500Hz, X, Y, Z directions)
- **Weight**
 - 1.2kg(2.65lb) without package/ 1.8kg(4.19lb) with package
- **Dimensions**
 - 200mm (7.87") (W) x 120mm (4.72") (D) x 46mm(1.81") (H)

1.2.4 Driver CD Content

- **Driver**
 - Audio
 - Chipset
 - Ethernet
 - Graphic
 - USB 3.0
- **Manual**
 - User Manual
 - Quick Manual







NOTE:All specifications and images are subject to change without notice.


1.3 Dimensions

The following diagrams show you dimensions and outlines of the

1.3.1 System Dimension

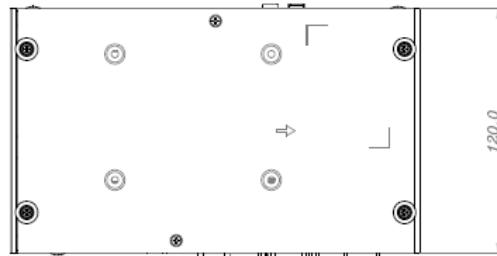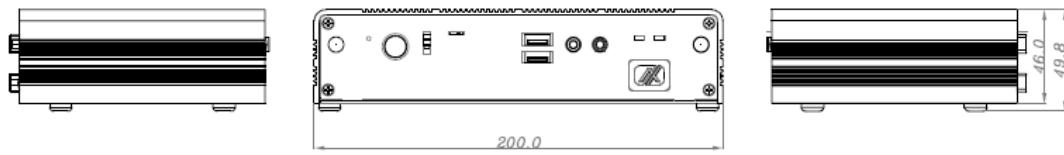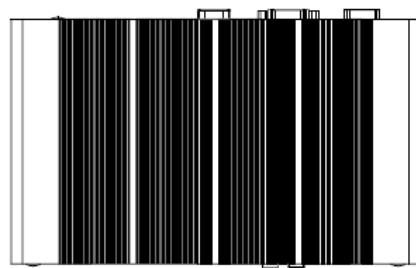

1.3.2 Wall mount Bracket Dimension

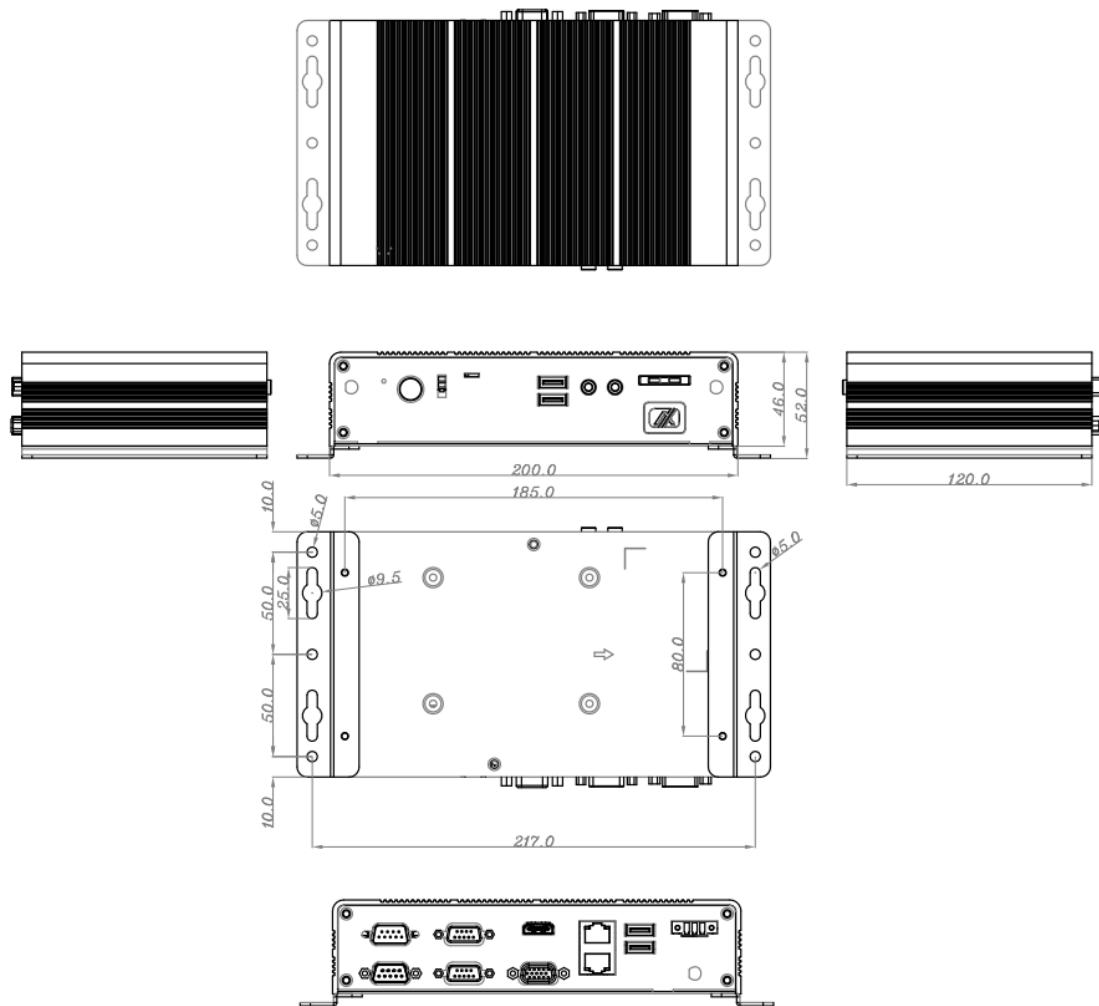


1.4 I/O Outlets

The following figures show you I/O outlets on front view of the .

- Front View




- Front View drawing

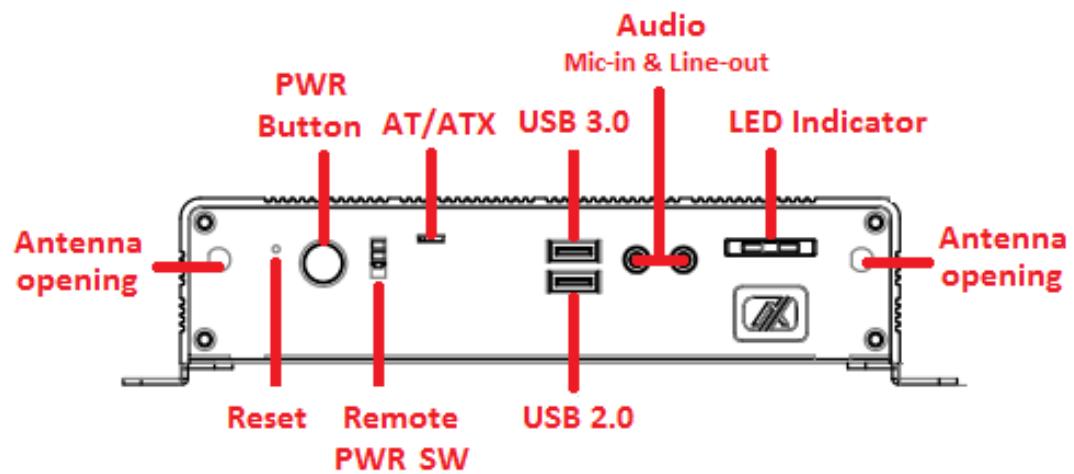

- Rear View



- Rear View drawing

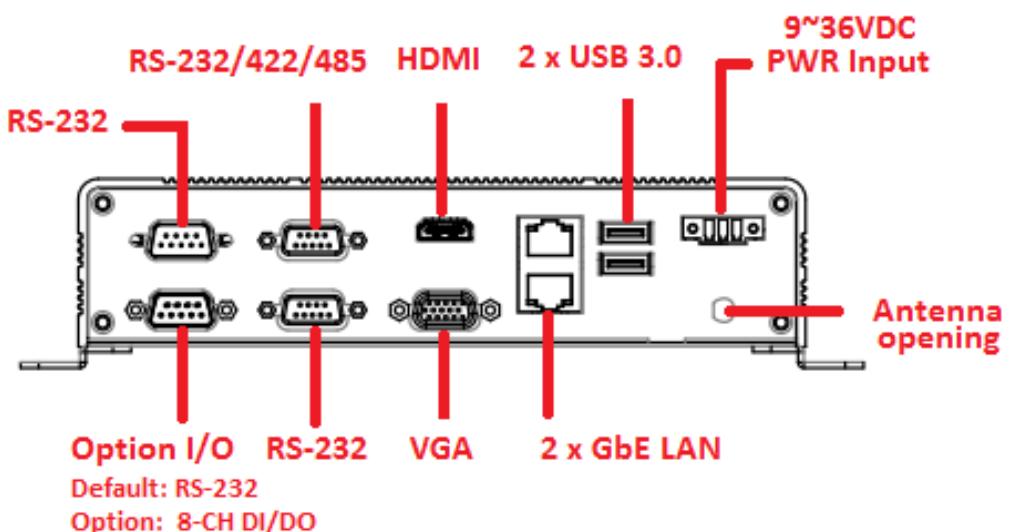

1.5 Packing List

The package bundled with your should contain the following items:

- CD x 1 (For Driver and User' s Manual)
- Screws pack x1
- Foot pad x4
- Wall-mount Brackets (optional)
- VESA-mount Bracket (optional)
- Din-rail Bracket (optional)
- 2.5" SATA Storage (optional)
- mSATA storage device (optional)
- DDR3L SODIMM (optional)
- WIFI/ 3G/ LTE Modules (optional)
- 8-CH Programmable DI/DO Cable Kit (optional)

1.6 Model List

	Fanless embedded system with Intel® Celeron® N3150 2.08GHz quad core single chip design, 4 COM, 4 USB and 9~36VDC power input
--	---


CHAPTER 2 HARDWARE INSTALLATION

The [] is convenient for your various hardware configurations, such as Memory Module, HDD (Hard Disk Drive), SSD (Solid State Drive) and mSATA. The chapter 2 will show you how to install the hardware.

2.1 Installing the Memory module


Step 1 Turn off the system, and unplug the power cord.

Step 2 Turn the system upside down to locate screws at the bottom, loosen screws.

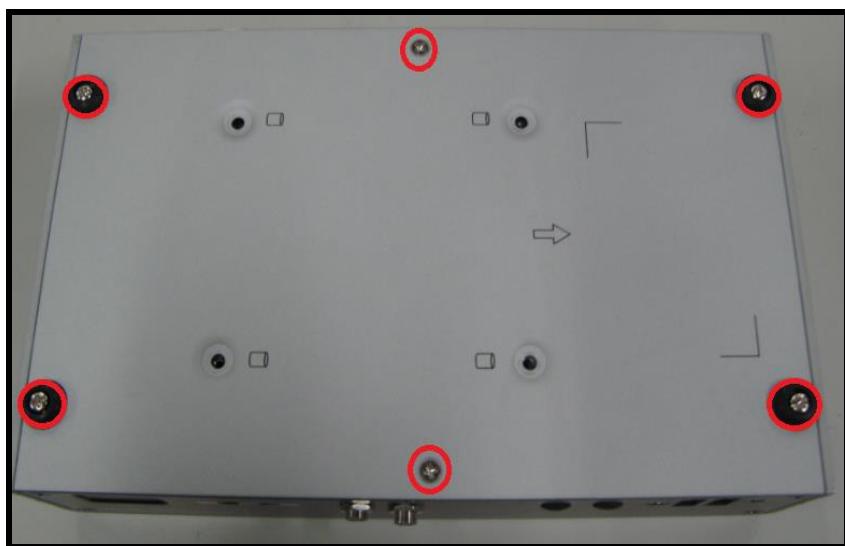


Step 3 Remove the bottom cover.


Step 4 Find the DDR3L SO-DIMM position.

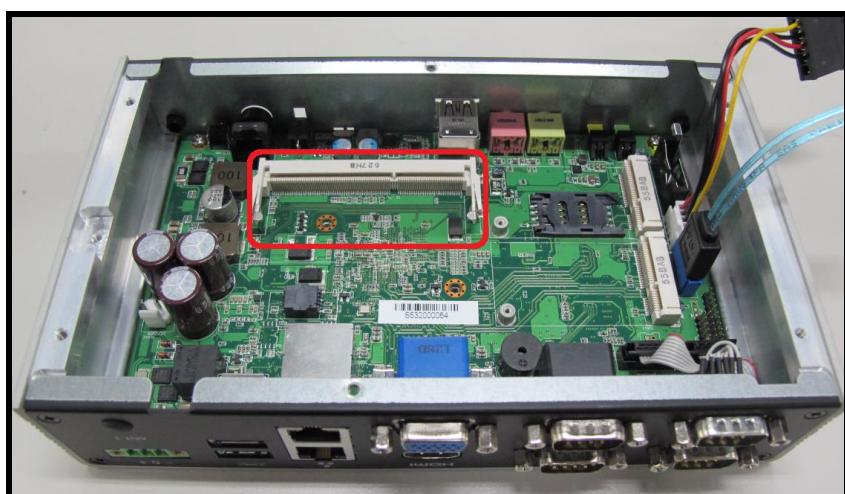

Step 5 Locate the memory module, insert the gold colored of memory to contact into the socket.

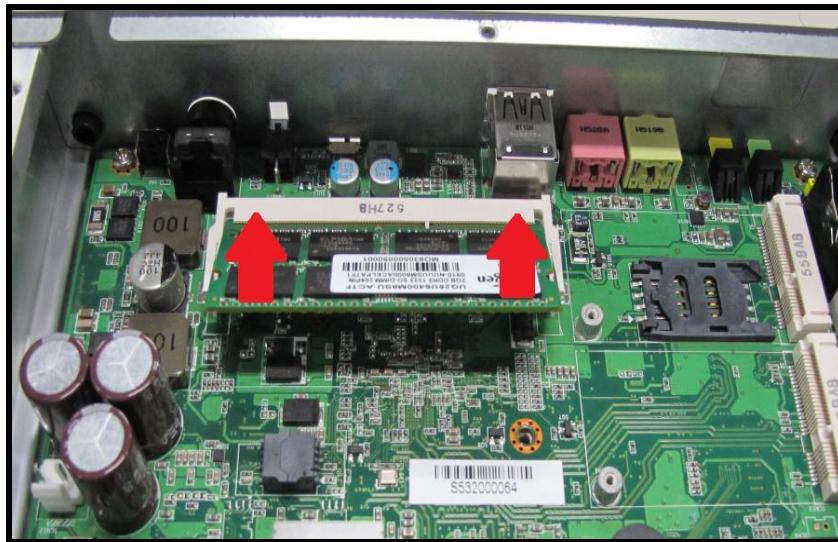

Step 6 Push the module down, until it is firmly seated by locking two latches on the sides.

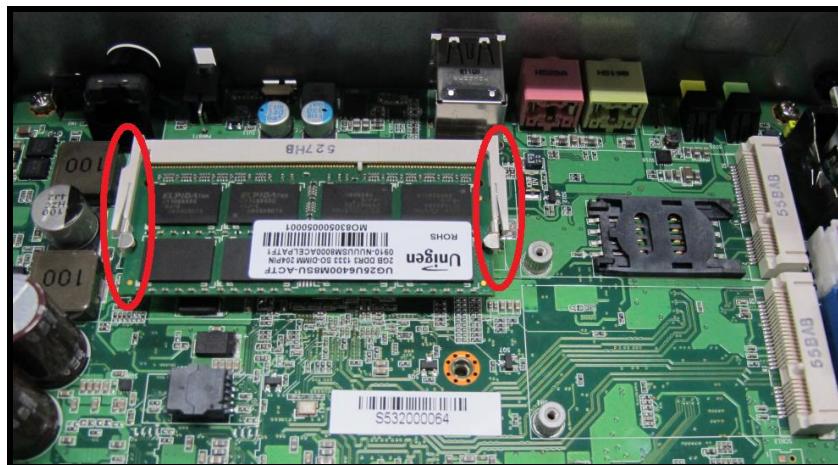


Step 7 Fasten all screws of bottom cover to finish installation.

2.2 Installing the 2.5" SATA HDD/SSD

Step 1 Turn off the system, and unplug the power cord.

Step 2 Turn the system upside down to locate screws at the bottom, loosen screws.

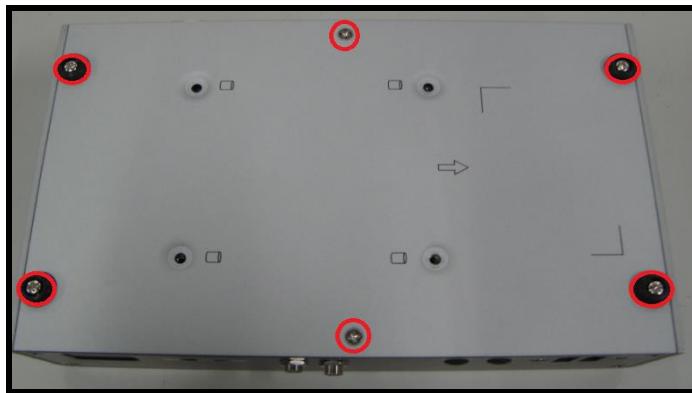

Step 3 Remove the bottom cover and then prepare your 2.5" HDD/SSD to assemble with your bottom cover.




Step 4 Please refer to the below photo and you can see some marks on the surface of bottom cover.



Step 5 Assembly the HDD on bottom cover and notice the connector position.




Step 6 Fasten total four screws.

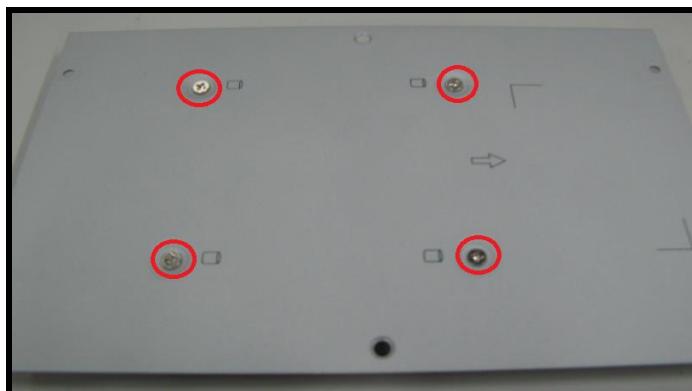

Step 7 Connect SATA PWR and SATA Signal cables.




Step 8 Put the bottom cover back then fasten screws to finish the installation.

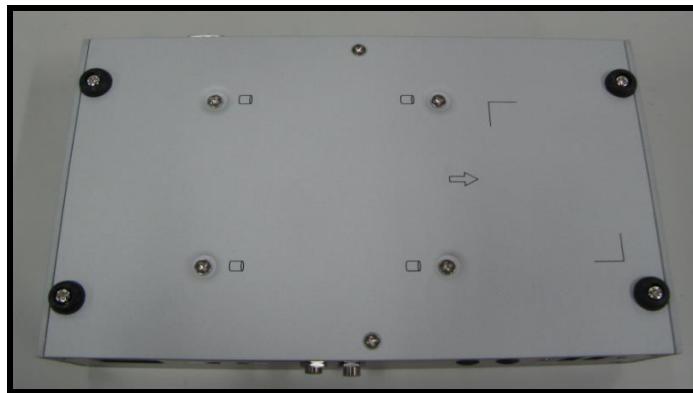


2.3 Installing the Express Mini Card

Step 1 Turn off the system, and unplug the power cord.

Step 2 Turn the system upside down to locate screws at the bottom, loosen screws.

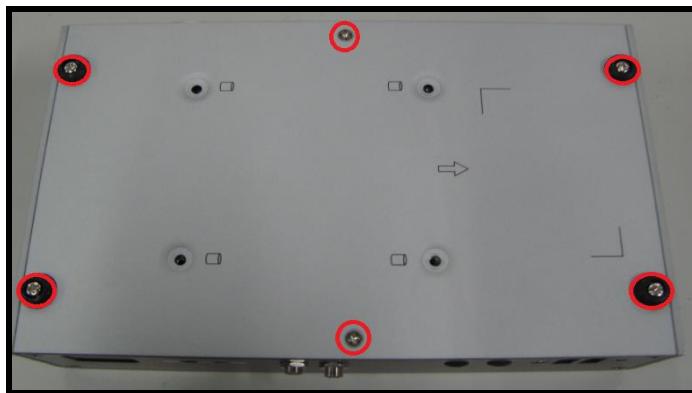


Step 3 Find the location of Mini card slot.

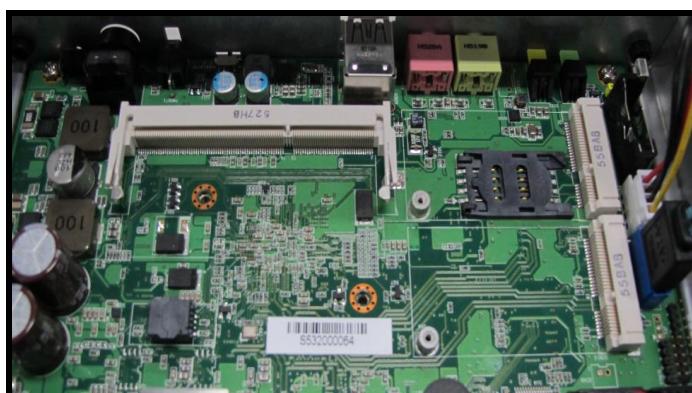

Step 4 Slide Mini PCIe Card into Mini PCIe slot with caution and fasten screw of Express Mini Card.




Step 5 Assembly the bottom cover back and fasten all screws to finish installation.

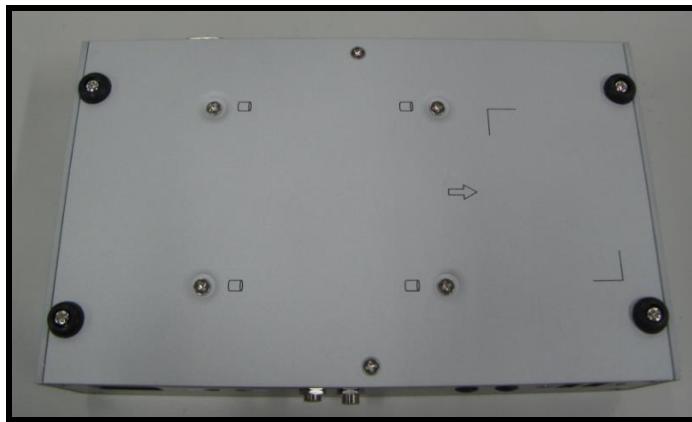

2.4 Installing the optional 8-CH DIO kit

Step 1 Turn off the system, and unplug the power cord.

Step 2 Turn the system upside down to locate screws at the bottom, loosen screws.

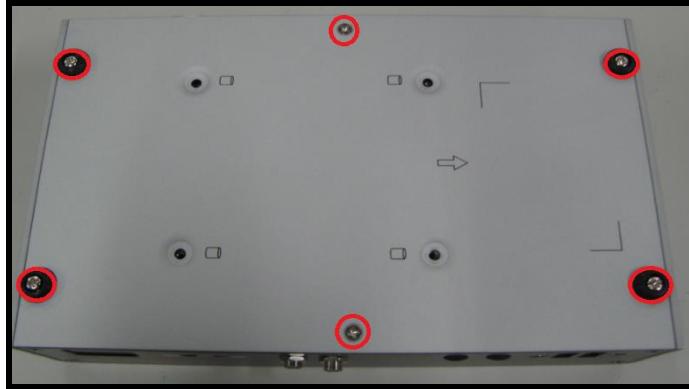


Step 3 Plug out the SCN8 connector of COM4 then loosen two hexagon pillars to remove COM4 cable.




Step 4 Prepare your 8-CH DIO cable then follow the below instruction to install 8-CH cable kit by yourself.



Step 5 Please notice the high spot of connector (10 pin) then connect it into SCN10. The high spot should be faced the mini card side.

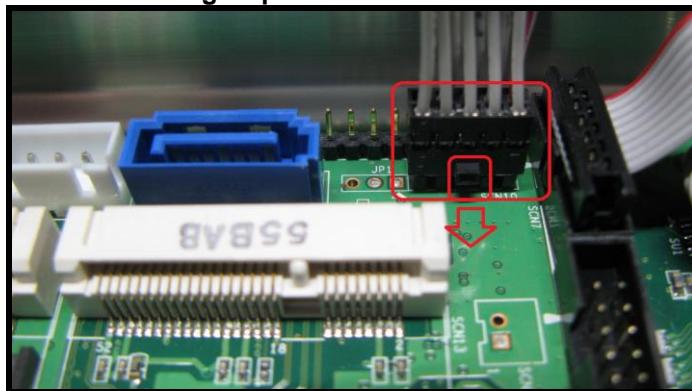


Step 6 Fasten two hexagon pillars with 8-CH DIO connector then complete installation.

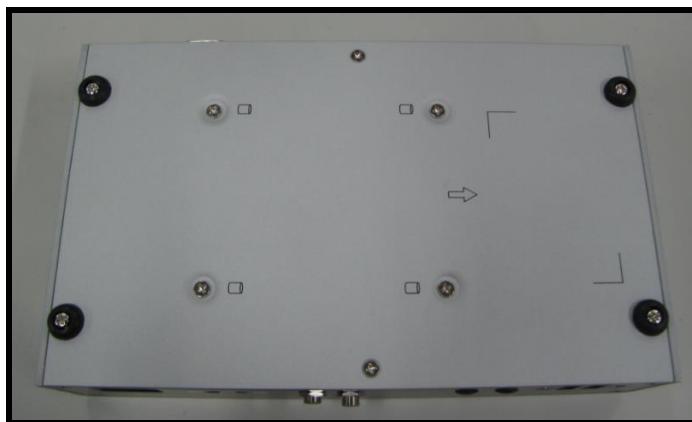


CHAPTER 3 JUMPER SETTING & CONNECTOR

Proper jumper settings configure the to meet your application purpose. We are herewith listing a summary table of all jumpers and default settings for onboard devices, respectively.

3.1 SBC layout

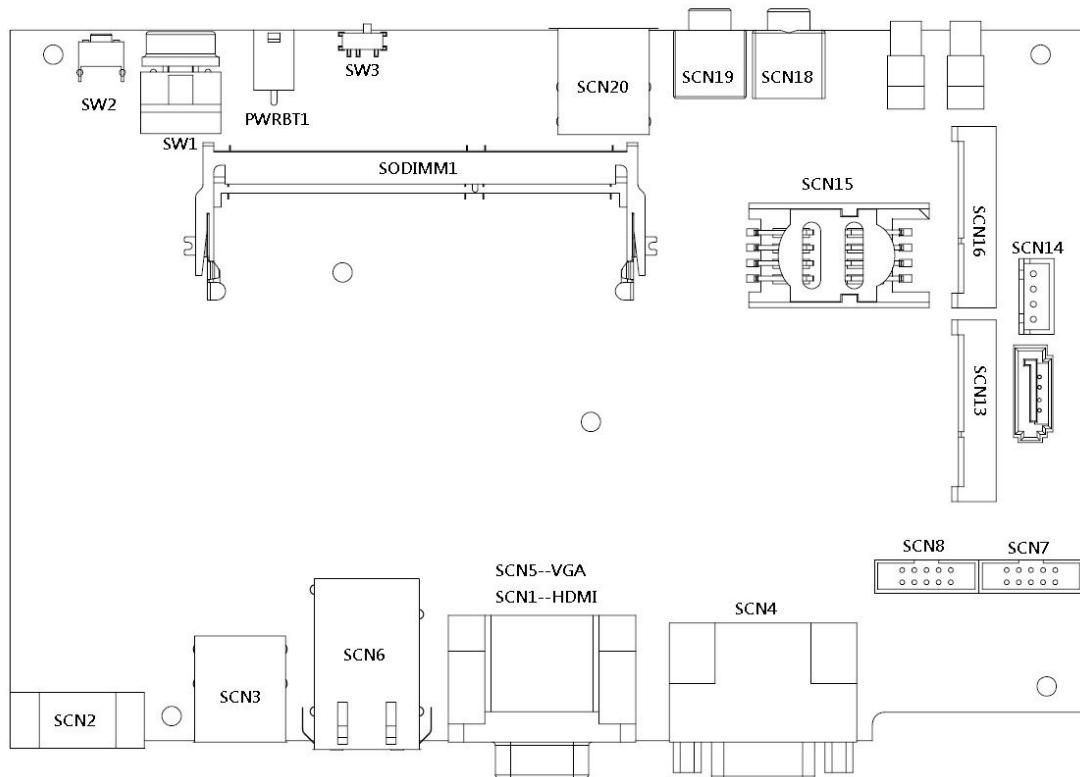

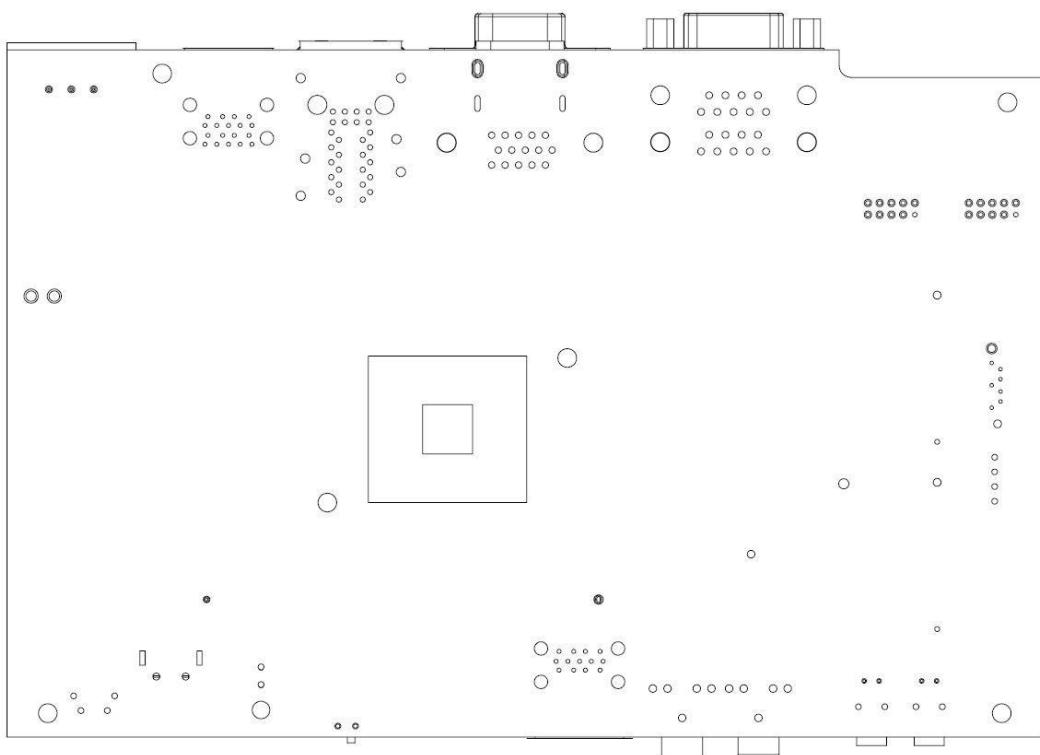

3.2 Jumper Setting Summary

Proper jumper settings configure the to meet your application purpose. We are herewith listing a summary table of all jumpers and default settings for onboard devices, respectively.

Jumper	Description	Jumper Setting
JP2	Restore BIOS Optimal Defaults Default: Normal Operation	1-2 Close



NOTE: How to setup Jumpers

The illustration shows how to set up jumpers. When the jumper cap is placed on pins, the jumper is “close”, if not, that means the jumper is “open”.



[Open]



[Closed]



[Pin1-2 Closed]

3.2.1 Restore BIOS Optimal Defaults (JP2)

Put jumper clip to pin 2-3 for a few seconds then move it back to pin 1-2. Doing this procedure can restore BIOS optimal defaults.

Function	Setting
Normal (Default)	1-2 close
Restore BIOS optimal defaults	2-3 close



3.3 Connectors


Connectors connect the board with other parts of the system. Loose or improper connection might cause problems. Make sure all connectors are properly and firmly connected. Here is a summary table shows you all connectors and button on the Series.

External Connectors	Section
DC Phoenix Power In Connector	3.3.1
COM1~COM4 Serial Port Connector	3.3.2
VGA Connector	3.3.3
HDMI Connector	3.3.4
Ethernet Connector(LAN1,LAN2)	3.3.5
ATX Power On/Off Button	3.3.6
Reset Button	3.3.7
Remote Power Switch Connector	3.3.8
AT/ATX Switch	3.3.9
USB 2.0 Connector	3.3.10
USB 3.0 Connector	3.3.11
Audio Connector	3.3.12
Option 8-CH Programmable DI/DO	3.3.13
Internal Connectors	Section
Serial ATA (SATA) Connector	3.3.14
SATA Power Connector	3.3.15
SIM Card Slot (SCN3)	3.3.16
Full-Size Express Mini Card slot	3.3.17

3.3.1 DC Phoenix Power In Connector

The system supports a wide range Phoenix DC-in connector (SCN2) for system power 9~36 VDC input.

Pin	Signal
1	+
2	GND
3	-





3.3.2 COM1~COM4 Serial Port Connector

The system has four serial ports. COM1 is RS-232/422/485 port & COM2 to COM4 are RS-232 ports. Please refer to Chapter 4.4 for the COM setting.

Please be informed that the optional of I/O output default is COM4 and users can through this optional port to support 8-CH programmable DI/DO, CAN...option modules.

Pin	RS-232	RS-485	RS-422
1	DCD, Data Carrier Detect	TX- / RX-	TX-
2	RXD, Receive Data	TX+ / RX+	TX+
3	TXD, Transmit Data	No use	RX+
4	DTR, Data Terminal Ready	No use	RX-
5	GND, Ground	GND	GND
6	DSR, Data Set Ready	No use	No use
7	RTS, Request To Send	No use	No use
8	CTS, Clear To Send	No use	No use
9	RI, Ring Indicator	No use	No use

Pin	RS-232	RS-485	RS-422
1	DCD, Data Carrier Detect		
2	RXD, Receive Data		
3	TXD, Transmit Data		
4	DTR, Data Terminal Ready		
5	GND, Ground		
6	DSR, Data Set Ready		
7	RTS, Request To Send		
8	CTS, Clear To Send		
9	RI, Ring Indicator		



3.3.3 VGA Connector

The VGA connector is a slim type 15-pin D-Sub connector which is common for the CRT VGA display. The VGA interface configuration can be configured via the software utility. Maximum resolution is up to 1920x1200@60Hz.


Pin	Signal	Pin	Signal	Pin	Signal
1	Red	2	Green	3	Blue
4	N.C.	5	GND	6	DETCT
7	GND	8	GND	9	VCC
10	GND	11	N.C.	12	DDC DATA
13	Horizontal Sync	14	Vertical Sync	15	DDC CLK



3.3.4 HDMI Connector

The HDMI (High-Definition Multimedia Interface) is a compact digital interface which is capable of transmitting high-definition video and high-resolution audio over a single cable. Maximum resolution is up to 3840x2160@30Hz or 2560x1600@60Hz.


Pin	Signal	Pin	Signal
1	HDMI OUT_DATA2+	2	GND
3	HDMI OUT_DATA2-	4	HDMI OUT_DATA1+
5	GND	6	HDMI OUT_DATA1-
7	HDMI OUT_DATA0+	8	GND
9	HDMI OUT_DATA0-	10	HDMI OUT_Clock+
11	GND	12	HDMI OUT_Clock-
13	CEC	14	N.C.
15	HDMI OUT_SCL	16	HDMI OUT_SDA
17	GND	18	+5V
19	HDMI_HTPLG		



3.3.5 LAN Connector (LAN1, LAN2)

The RJ-45 connector is for Ethernet. To connect the board to a 1000/100/10 Base-T hub, just plug one end of the cable into connector and connect the other end (phone jack) to a 1000/100/10-Base-T hub.

Pin	Signal	Pin	Signal
L1	MDI0+	L5	MDI2-
L2	MDI0-	L6	MDI1-
L3	MDI1+	L7	MDI3+
L4	MDI2+	L8	MDI3-
A	Active LED (Yellow)		
B	100 LAN LED (Green)/ 1000 LAN LED (Orange)		

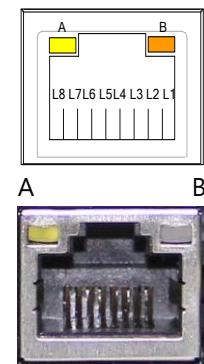

3.3.6 ATX Power ON/OFF Button

The ATX power button is on the I/O side. It can allow users to control power on/off.

Function	Description
On	Turn on/off system
Off	Keep system status



3.3.7 Reset Button

The Reset button can allow users to reset situation.


Function	Description
On	Reset system
Off	Keep system status



3.3.8 Remote Power Switch Connector


One 2-pin connector output for remote power on/off switch.

Function	Description
Short(1-2)	Turn on/off system
Open	Keep system status



3.3.9 AT/ATX Switch


If you set AT/ATX switch to AT mode, the system will be automatically power on without pressing soft power button during power input; we can use this switch to achieve auto power on demand.



3.3.10 USB 2.0 Connector

The Universal Serial Bus connectors are compliant with USB 2.0 (480Mbps), and ideally for installing USB peripherals such as keyboard, mouse, scanner, etc.


Pin	Signal USB Port 0
1	USB VCC (+5V level)
2	USB #0_D-
3	USB #0_D+
4	Ground (GND)



3.3.11 USB 3.0 Connector

The Universal Serial Bus connectors are compliant with USB 3.0 (5Gb/s), and ideally for installing USB peripherals such as keyboard, mouse, scanner, etc.


Pin	Signal USB Port 0	Pin	Signal USB Port 1
1	USB_VCC (+5V level standby power)	10	USB_VCC (+5V level standby power)
2	USB_Data2-	11	USB_Data3-
3	USB_Data2+	12	USB_Data3+
4	GND	13	GND
5	SSRX2-	14	SSRX3-
6	SSRX2+	15	SSRX3+
7	GND	16	GND
8	SSTX2-	17	SSTX3-
9	SSTX2+	18	SSTX3+



3.3.12 Audio Connector

These two audio jacks ideal are for Audio Mic-In and Audio Line-out.

Pin	Signal
1	Microphone In
2	Line Out




3.3.13 Option 8-CH DI/DO Connector

- supports one optional I/O output connector, and default set to COM4/RS-232 mode. This onboard digital I/O has 8 bits (DIO0~7) by SCN10 connector. Each bit can be set to function as input or output by software programming, and users can set up them via BIOS setting.

If users would like to get 8-CH programmable DI/DO function

- offers one 8 -CH programmable DI/DO option kit and users can install this kit by themselves to instead of COM4.


Pin	Description
1	DIO0
2	DIO1
3	DIO2
4	DIO3
5	DIO4
6	DIO5
7	DIO6
8	DIO7
9	GND



3.3.14 SATA Connector

These Serial Advanced Technology Attachment (Serial ATA or SATA) connectors are for high-speed SATA interfaces. They are computer bus interfaces for connecting to devices such as hard disk drives. This board has two SATA 3.0 ports with 6Gb/s performance.


Pin	Signal
1	GND
2	SATA_TX+
3	SATA_TX-
4	GND
5	SATA_RX-
6	SATA_RX+
7	GND



3.3.15 SATA Power Connector

Use SCN14 for interfacing to SATA 2.5" HDD/SSD power supply.


Pin	Signal
1	+12V level
2	GND
3	GND
4	+5V level



3.3.16 SIM Card Slot (SCN15)

This board supports SCN15 socket on the bottom side for inserting SIM Card. In order to work properly, **the SIM Card must be used together with 3G/LTE module which SCN16 is inserted**. It is mainly used in 3G/LTE wireless network application.

Pin	Signal
1	PWR
2	RST
3	CLK
4	NC
5	GND
6	VPP
7	I/O
8	NC



3.3.17 Full-Size PCI Express Mini Card Slot (SCN13 & SCN16)


- supports dual full -size PCI-Express Mini Card slots.

SCN16 is applying to either PCI-Express or USB 2.0 signal, and complies with PCI-Express Mini Card Spec. V1.2.

SCN13 is applying for PCI-Express and SATA (mSATA)signals and complies with PCI-Express Mini Card Spec. V1.2. Thus, users can install mSATA cards into this slot. Please refer to the SATA of BIOS setting to enable or disable mSATA supported.


SCN16:

Pin	Signal	Pin	Signal
1	WAKE#	2	+3.3V_SBY
3	No use	4	GND
5	No use	6	+1.5V
7	CLKREQ#	8	No use
9	GND	10	No use
11	REFCLK-_2	12	No use
13	REFCLK+_2	14	No use
15	GND	16	No use
17	No use	18	GND
19	No use	20	W_DISABLE#
21	GND	22	PERST#
23	PE_RXN_2	24	+3.3V_SBY
25	PE_RXP_2	26	GND
27	GND	28	+1.5V
29	GND	30	SMB_CLK
31	PE_TXN_2	32	SMB_DATA
33	PE_TXP_2	34	GND
35	GND	36	USB_D3-
37	GND	38	USB_D3+
39	+3.3V_SBY	40	GND
41	+3.3V_SBY	42	No use
43	GND	44	No use
45	No use	46	No use
47	No use	48	+1.5V
49	No use	50	GND
51	No use	52	+3.3V_SBY

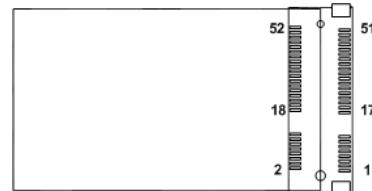

SCN13:

Pin	Signal	Pin	Signal
1	WAKE#	2	+3.3V_SBY
3	No use	4	GND
5	No use	6	+1.5V
7	CLKREQ#	8	No use
9	GND	10	No use
11	REFCLK-_3	12	No use
13	REFCLK+_3	14	No use
15	GND	16	No use
17	No use	18	GND
19	No use	20	W_DISABLE#
21	GND	22	PERST#
23	PE_RXN_3	24	+3.3V_SBY
25	PE_RXP_3	26	GND
27	GND	28	+1.5V
29	GND	30	SMB_CLK
31	PE_TXN_3	32	SMB_DATA
33	PE_TXP_3	34	GND
35	GND	36	No use
37	GND	38	No use
39	+3.3V_SBY	40	GND
41	+3.3V_SBY	42	No use
43	GND	44	No use
45	No use	46	No use
47	No use	48	+1.5V
49	No use	50	GND
51	No use	52	+3.3V_SBY

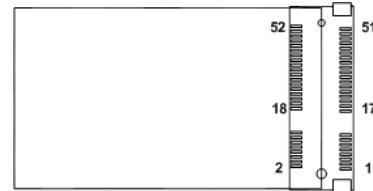

Reference:



CHAPTER 4

BIOS SETUP UTILITY

This chapter provides users with detailed description how to set up basic system configuration through the BIOS setup utility.

4.1 Starting

To enter the setup screens, follow the steps below:

1. Turn on the computer and press the key immediately.
2. After you press the key, the main BIOS setup menu displays. You can access the other setup screens from the main BIOS setup menu, such as the Advanced and Chipset menus.

It is strongly recommended that you should avoid changing the chipset's defaults. Both AMI and your system manufacturer have carefully set up these defaults that provide the best performance and reliability.

4.2 Navigation Keys

The BIOS setup/utility uses a key-based navigation system called hot keys. Most of the BIOS setup utility hot keys can be used at any time during the setup navigation process. These keys include <F1>, <F2>, <Enter>, <ESC>, <Arrow> keys, and so on.



NOTE: Some of the navigation keys differ from one screen to another.

Hot Keys	Description
→← Left/Right	The Left and Right <Arrow> keys allow you to select a setup screen.
↑↓ Up/Down	The Up and Down <Arrow> keys allow you to select a setup screen or sub-screen.
+− Plus/Minus	The Plus and Minus <Arrow> keys allow you to change the field value of a particular setup item.
Tab	The <Tab> key allows you to select setup fields.
F1	The <F1> key allows you to display the General Help screen.
F2	The <F2> key allows you to Load Previous Values.
F3	The <F3> key allows you to Load Optimized Defaults.
F4	The <F4> key allows you to save any changes you have made and exit Setup. Press the <F4> key to save your changes.
Esc	The <Esc> key allows you to discard any changes you have made and exit the Setup. Press the <Esc> key to exit the setup without saving your changes.
Enter	The <Enter> key allows you to display or change the setup option listed for a particular setup item. The <Enter> key can also allow you to display the setup sub-screens.

4.3 Main Menu

When you first enter the setup utility, you will enter the Main setup screen. You can always return to the Main setup screen by selecting the Main tab. System Time/Date can be set up as described below. The Main BIOS setup screen is shown below.



BIOS/Memory Information

Display the auto-detected BIOS/memory information.

System Language

Choose the system default language.

System Date/Time

Use this option to change the system time and date. Highlight System Time or System Date using the <Arrow> keys. Enter new values through the keyboard. Press the <Tab> key or the <Arrow> keys to move between fields. The date must be entered in MM/DD/YY format. The time is entered in HH:MM:SS format.

Access Level


Display the access level of current user.

4.4 Advanced Menu

The Advanced menu also allows users to set configuration of the CPU and other system devices. You can select any of the items in the left frame of the screen to go to the sub menus:

- ▶ ACPI Settings
- ▶ NCT6106D Super IO Configuration
- ▶ NCT6106D HW Monitor
- ▶ DIO Configuration
- ▶ CPU Configuration
- ▶ SATA Configuration
- ▶ USB Configuration
- ▶ Utility Configuration

For items marked with “▶”, please press <Enter> for more options.

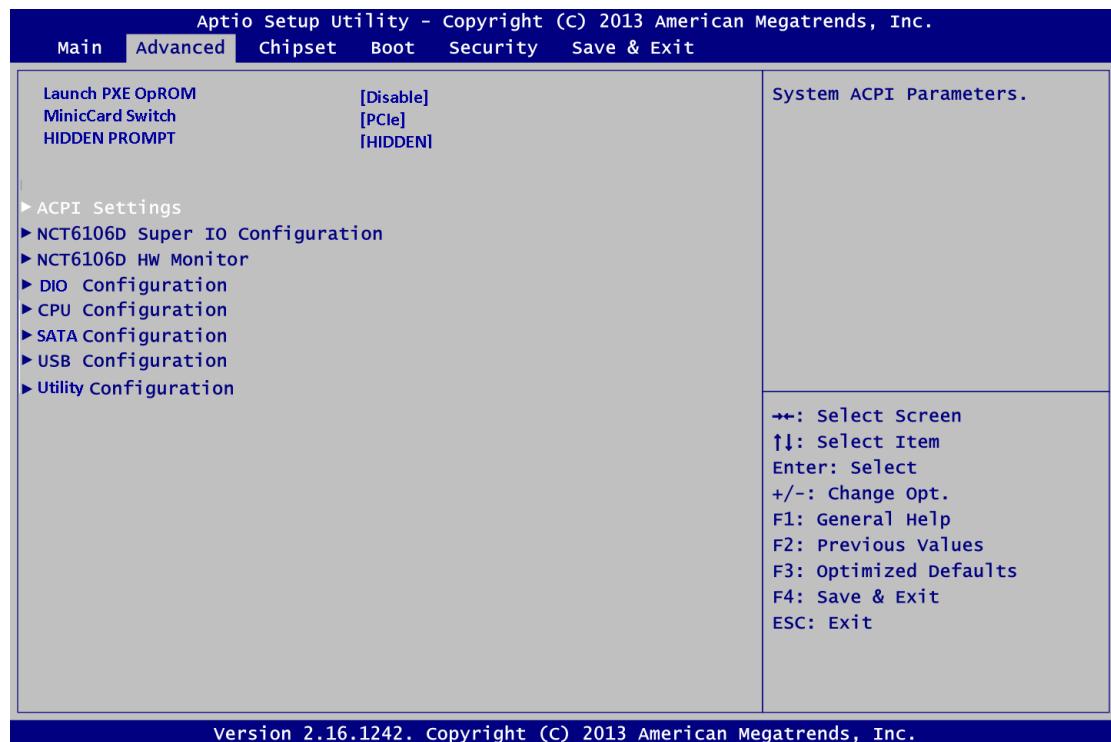

Launch PXE OpROM

Use this item to enable or disable the boot ROM function of the onboard LAN chip when the system boots up.


MiniCard Switch

Users can adjust the signal setting for **SCN13 Mini PCI Express slot** to adjust PCIe or SATA mode for usage.

HIDDEN PROMPT

Default is set to HIDDEN mode, users can adjust detail setting if this item is enabled.

● ACPI Settings

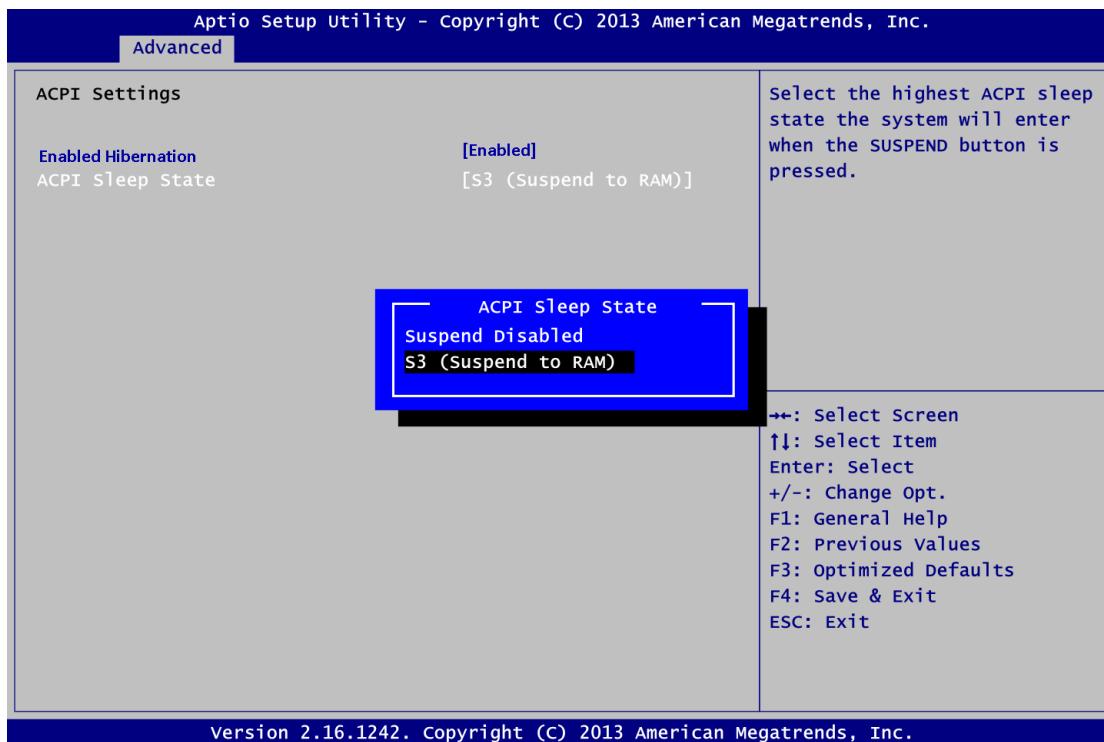

Enable Hibernation


Enables or disables system ability to Hibernate. This option may be not effective with some OS.

ACPI Sleep State

When the sleep button is pressed, the system will be in the ACPI sleep state. The default is S3 (Suspend to RAM).

- **NCT6106D Super IO Configuration**


You can use this screen to select options for the Super IO Configuration, and change the value of the selected option. A description of the selected item appears on the right side of the screen. For items marked with “▶”, please press <Enter> for more options.

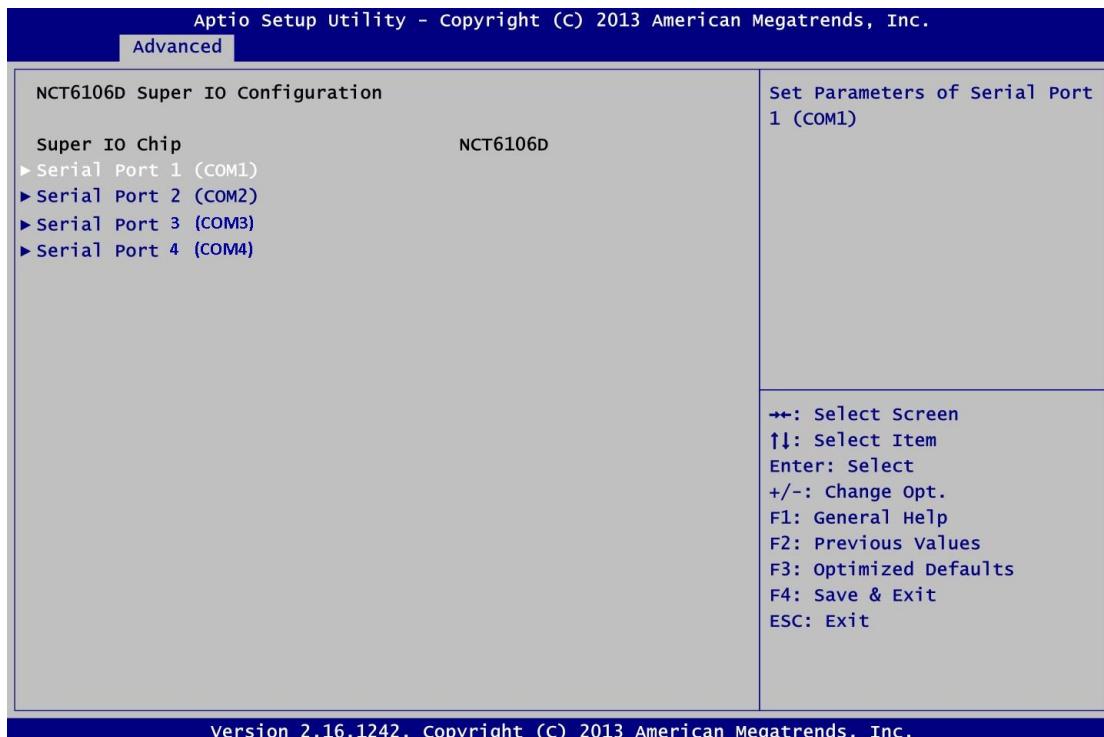

Serial Port 1~4 (COM1~4) Configuration

Use these items to set parameters related to serial port 1~4.

- **Serial Port 1 (COM1) Configuration**

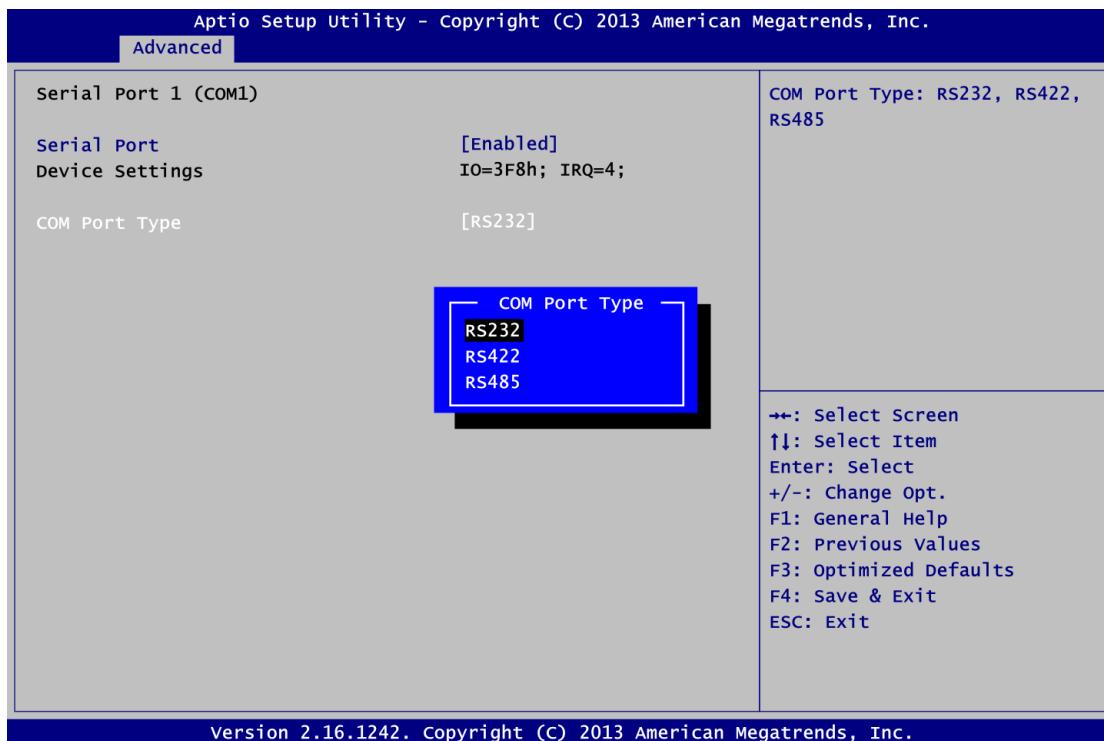


Serial Port

Enable or disable serial port 1. The optimal setting for base I/O address is 3F8h and for interrupt request address is IRQ4.

COM Port Type

Use this option to set RS-232/RS-422/RS-485 mode.

- **Serial Port 2 (COM2) Configuration**

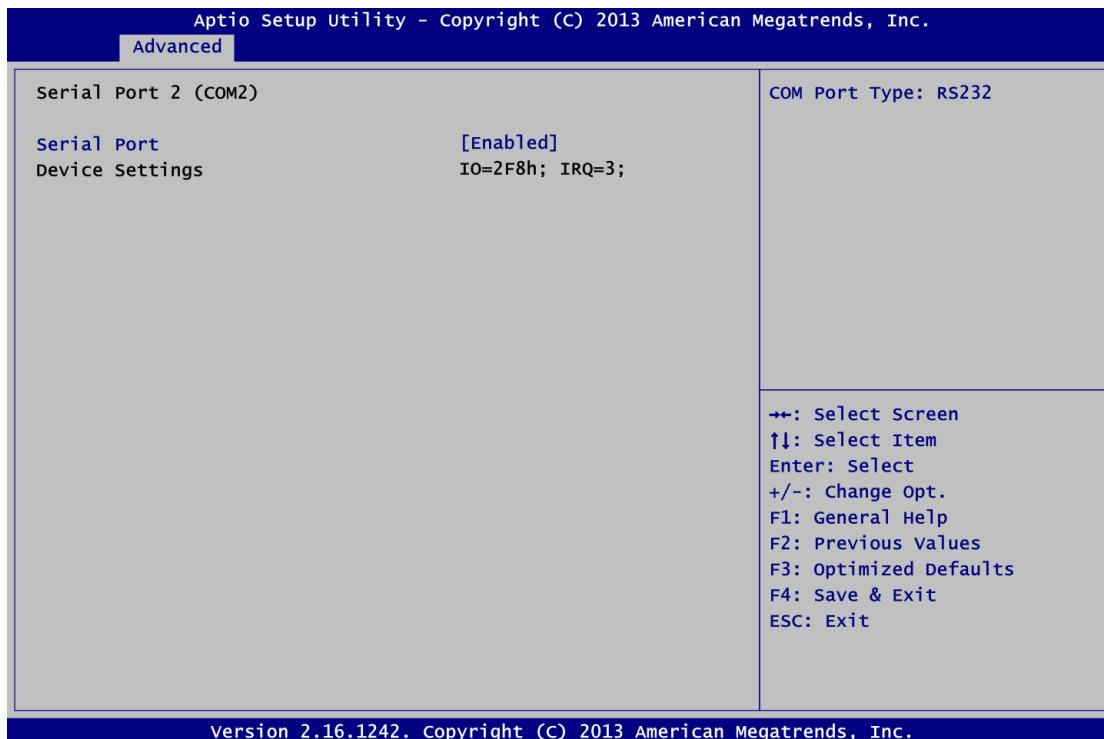


Serial Port

Enable or disable serial port 2. The optimal setting for base I/O address is 2F8h and for interrupt request address is IRQ3.

COM Port Type

RS-232 mode.

● **Serial Port 3 (COM3) Configuration**

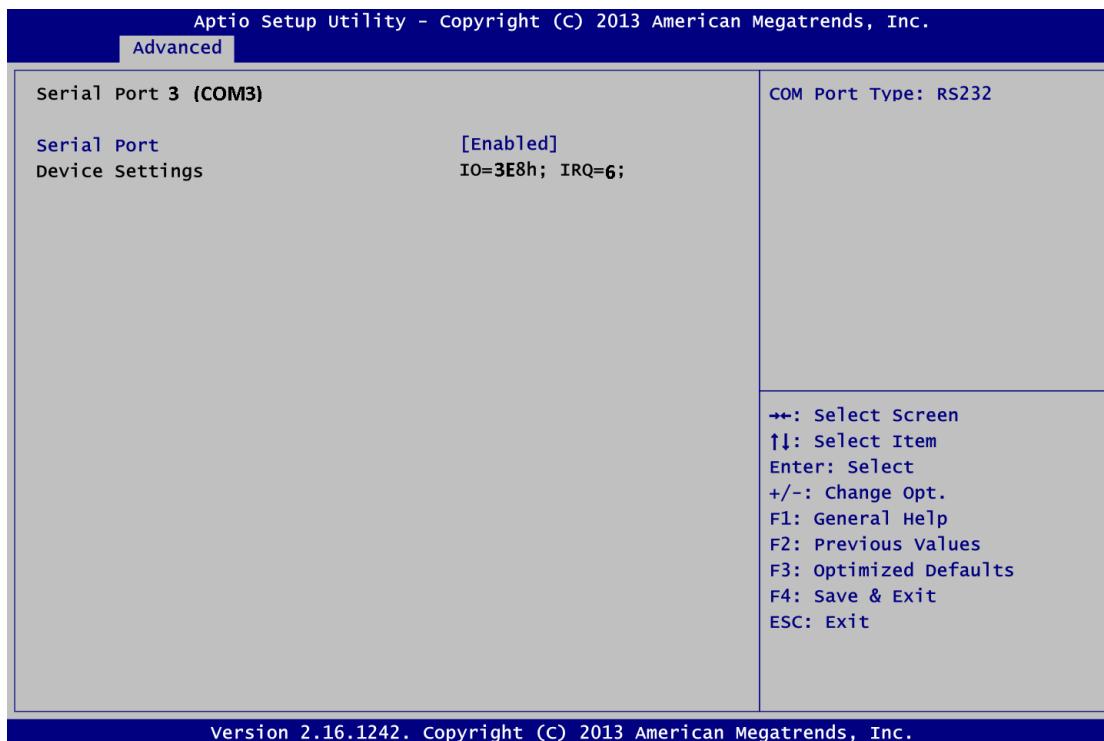


Serial Port

Enable or disable serial port 3. The optimal setting for base I/O address is 3E8h and for interrupt request address is IRQ6.

COM Port Type

RS-232 mode.

- **Serial Port 4 (COM4) Configuration**

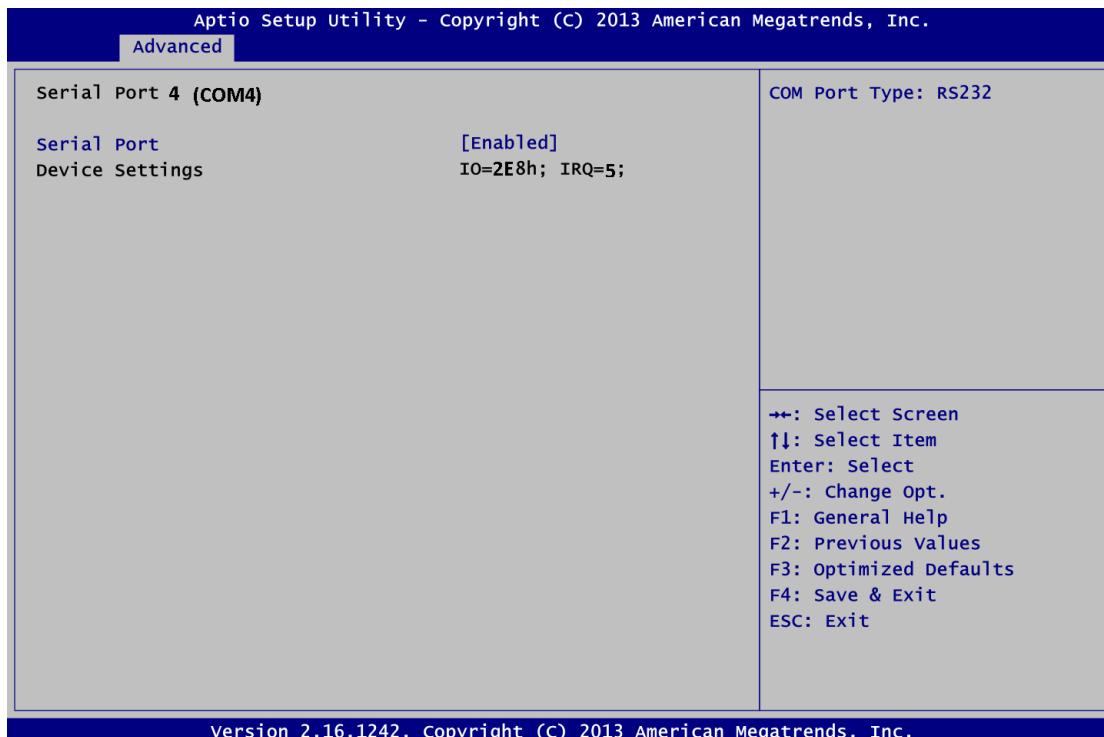

Serial Port


Enable or disable serial port 3. The optimal setting for base I/O address is 2E8h and for interrupt request address is IRQ5.

COM Port Type

RS-232 mode.

● NCT6106D HW Monitor


This screen monitors hardware health status.

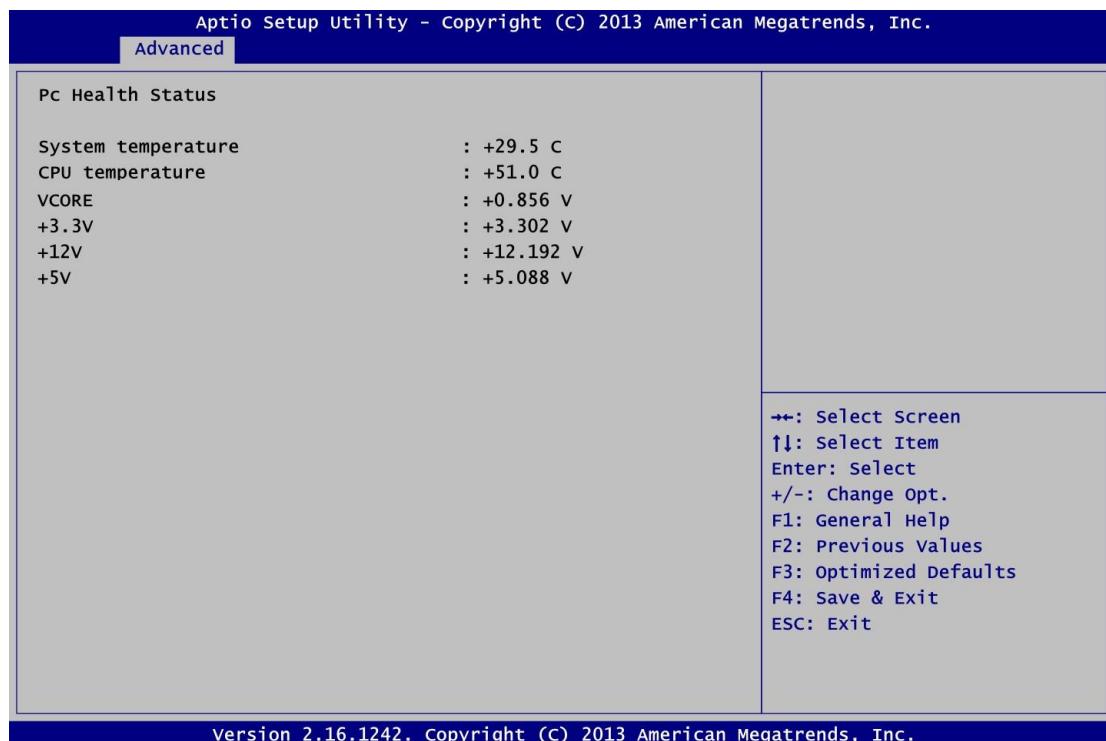

This screen displays the temperature of system and CPU, and system voltages (VCORE, +3.3V, +12V and +5V).

- **DIO Configuration**

Users can adjust the option 8-CH DIO default setting via this page. This board doesn't support 8-CH DIO option for standard version, users can order this kit then change the option port to support 8-CH TTL DIO.

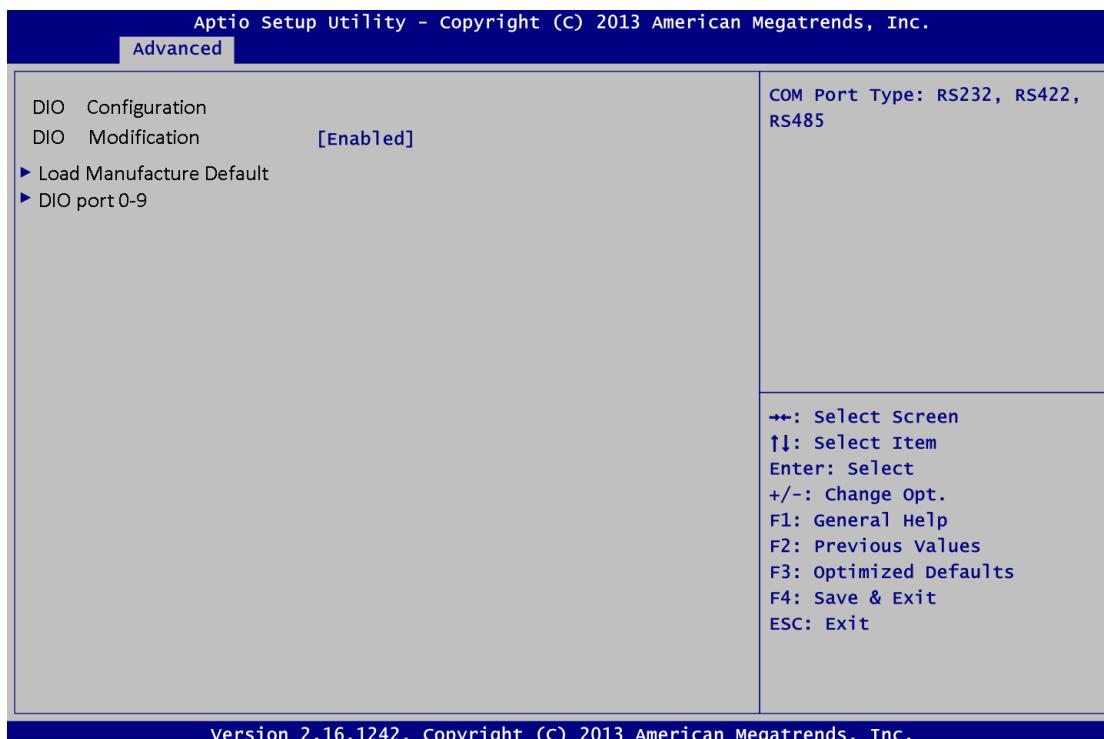

DIO Modification

Enable or disable DIO setting, please be ensured the DIO cable kit is connected.

Load Manufacture Default


Clear the setting to default.

DIO port 0-9

This screen displays the input and output status of DIO setting, users can adjust each port to high or low.

- **CPU Configuration**

This screen shows the CPU Configuration.

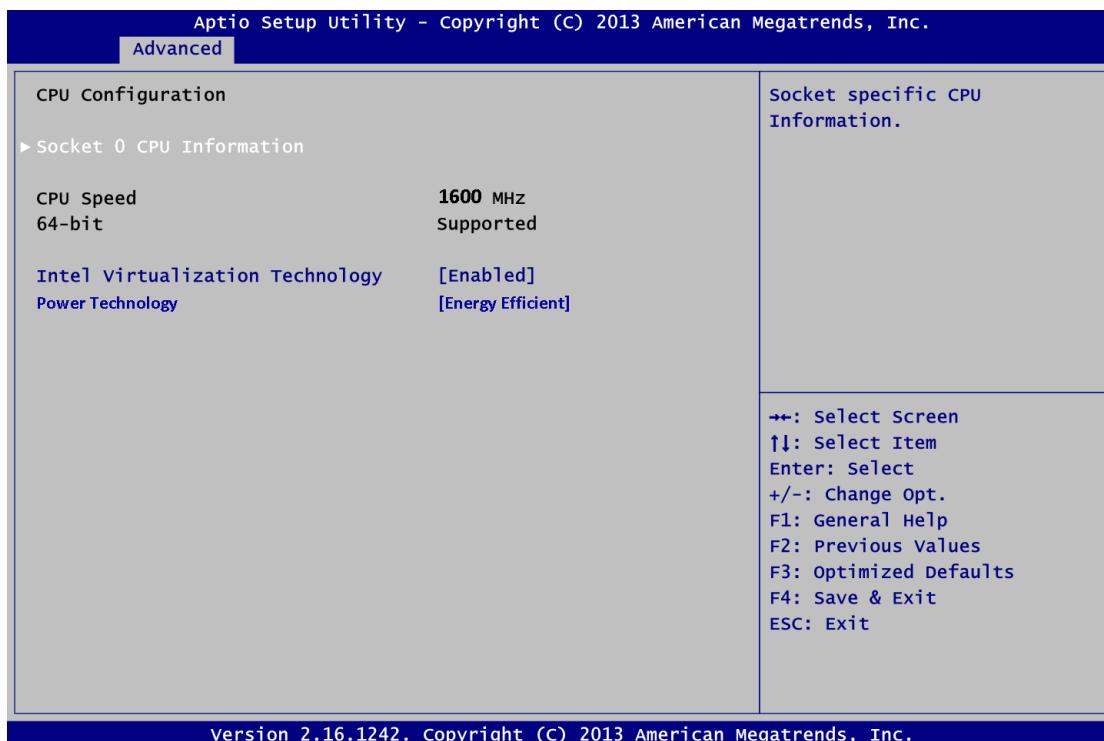

Socket 0 CPU Information

This item is for socket specific CPU information.

Intel Virtualization Technology

Allow a hardware platform to run multiple operating systems separately and simultaneously, enabling one system to virtually function as several systems.

Power Technology

According to setting to adjust the power management features.

Disable- Disable power technology function.

Energy Efficient- Default is set to Energy Efficient mode.

Custom- Based on users setting to adjust **EIST, Turbo Mode & Package C State Limit** features.

EIST

Disable or enable Intel SpeedStep function.

Turbo Mode


Disable or enable Turbo Mode function by this item, and the SoC will burst up the CPU frequency once turbo mode is enabled. Please note that the turbo mode may be affected by the operating temperature, since the power consumption.

Package C State Limit

Select Package C State Limit setting.

- **SATA Configuration**

In the SATA Configuration menu, you can see the currently installed hardware in the SATA ports. During system boot up, the BIOS automatically detects the presence of SATA devices.

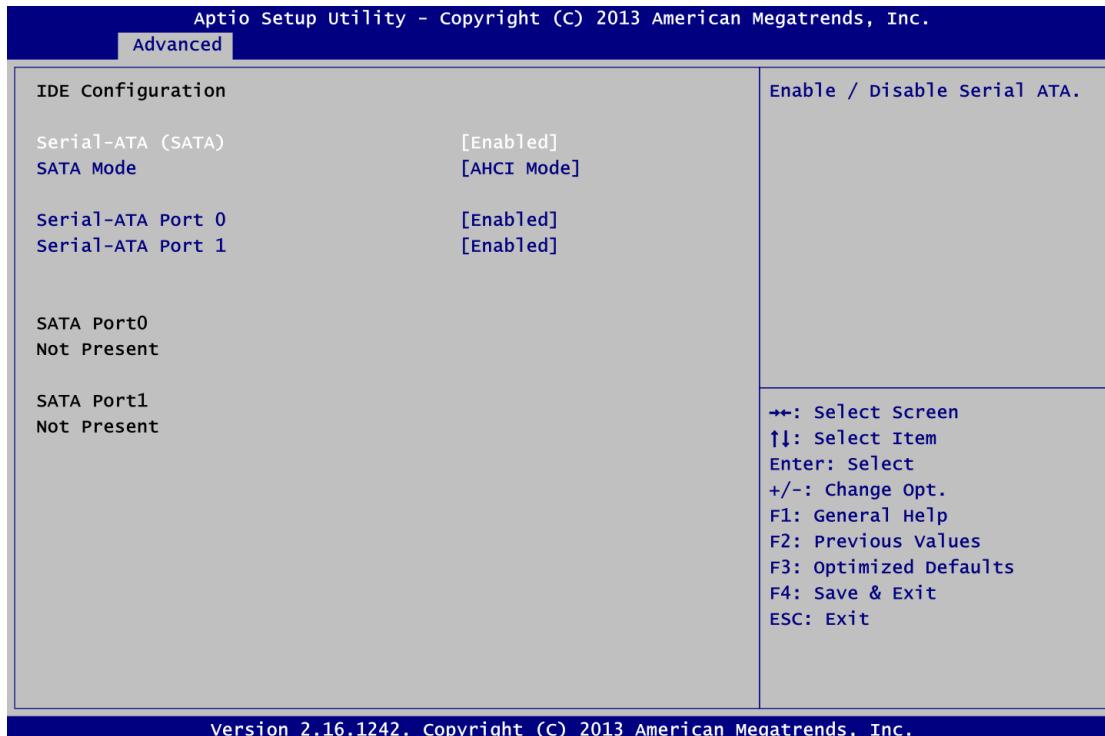


Serial-ATA Controller (SATA)

Enable or disable the SATA Controller feature. The default is enabled.

SATA Mode Selection

Determine how SATA controller(s) operate. The default is AHCI (Advanced Host Controller Interface) Mode.

● USB Configuration

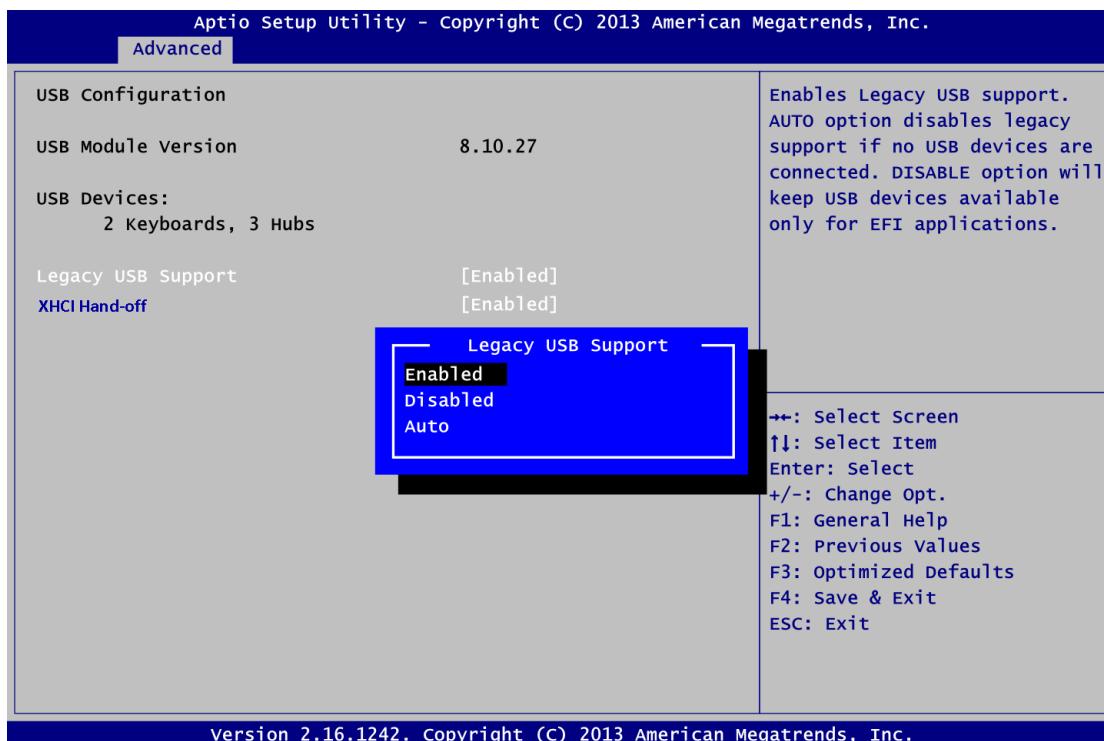

USB Devices

Display all detected USB devices.

Legacy USB Support

Use this item to enable or disable support for USB device on legacy operating system. The default setting is Enabled. Auto option disables legacy support if no USB devices are connected. Disable option will keep USB devices available only for EFI applications.


XHCI Hand-off

This is a workaround for OSes without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.

● **Utility Configuration**

Generally when you download a BIOS for matching AMI Flasher version.

, you will have included a

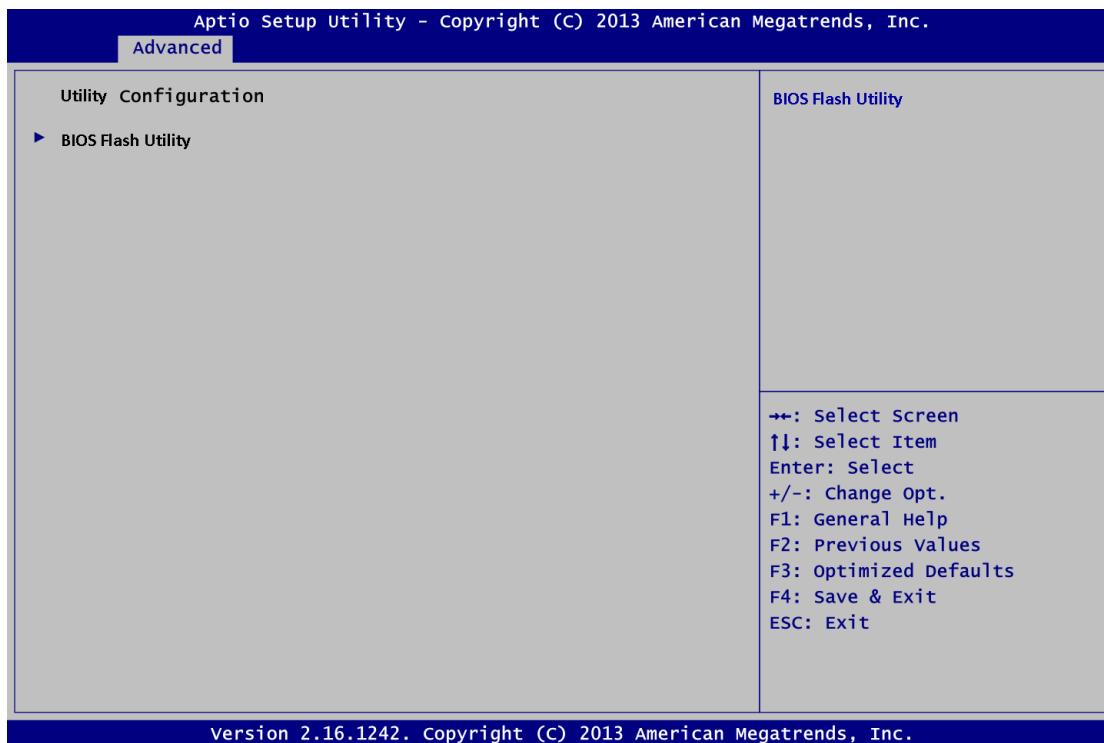

BIOS Flash Utility


You can execute the BIOS flasher.

4.5 Chipset Menu


The Chipset menu allows users to change the advanced chipset settings. You can select any of the items in the left frame of the screen to go to the sub menus:

- ▶ North Bridge
- ▶ South Bridge

For items marked with “▶”, please press <Enter> for more options.

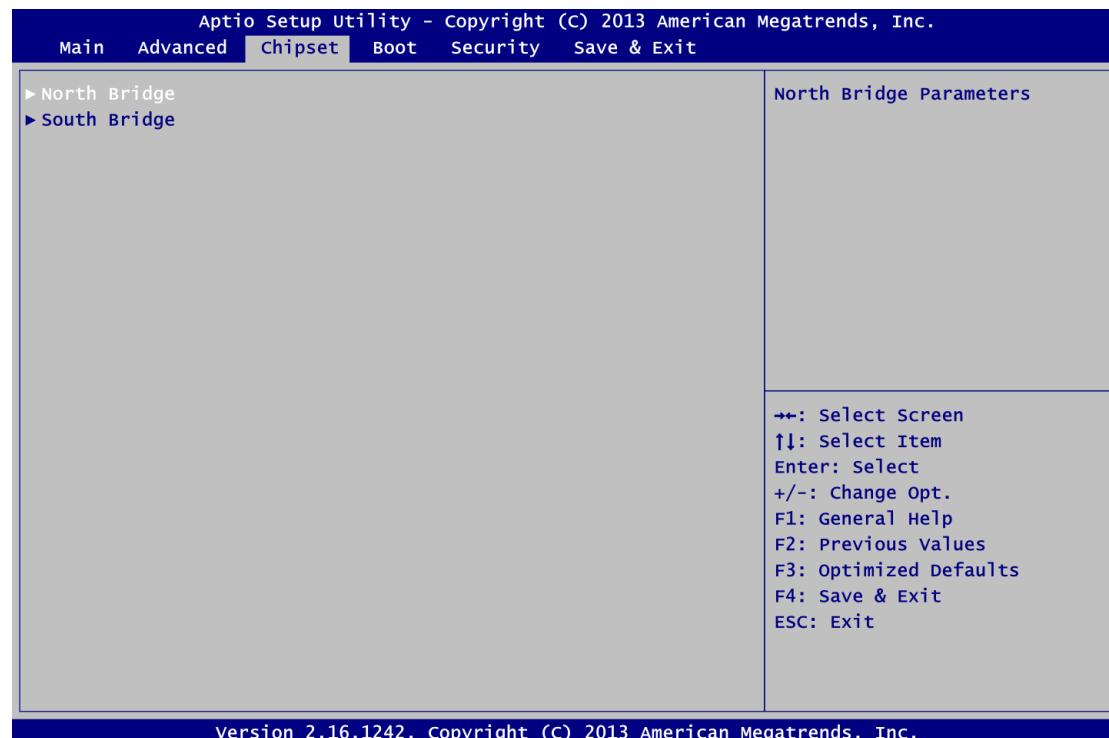


● North Bridge

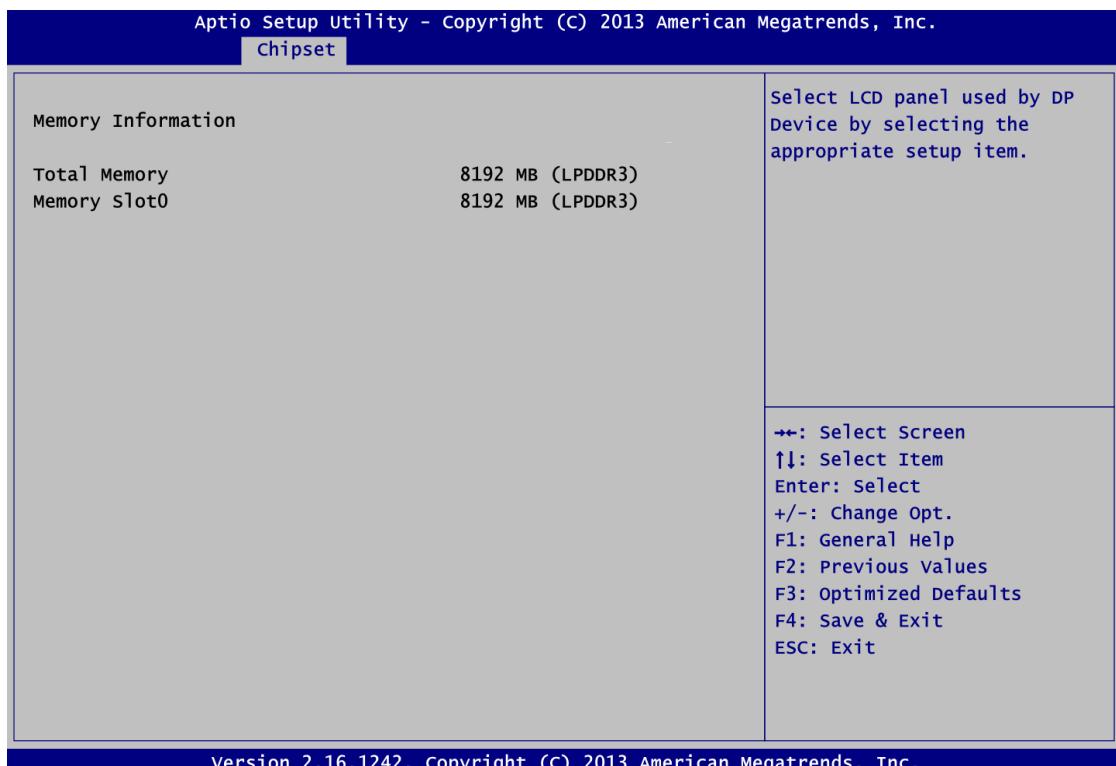

- **South Bridge**

This screen allows users to configure parameters of South Bridge chipset.

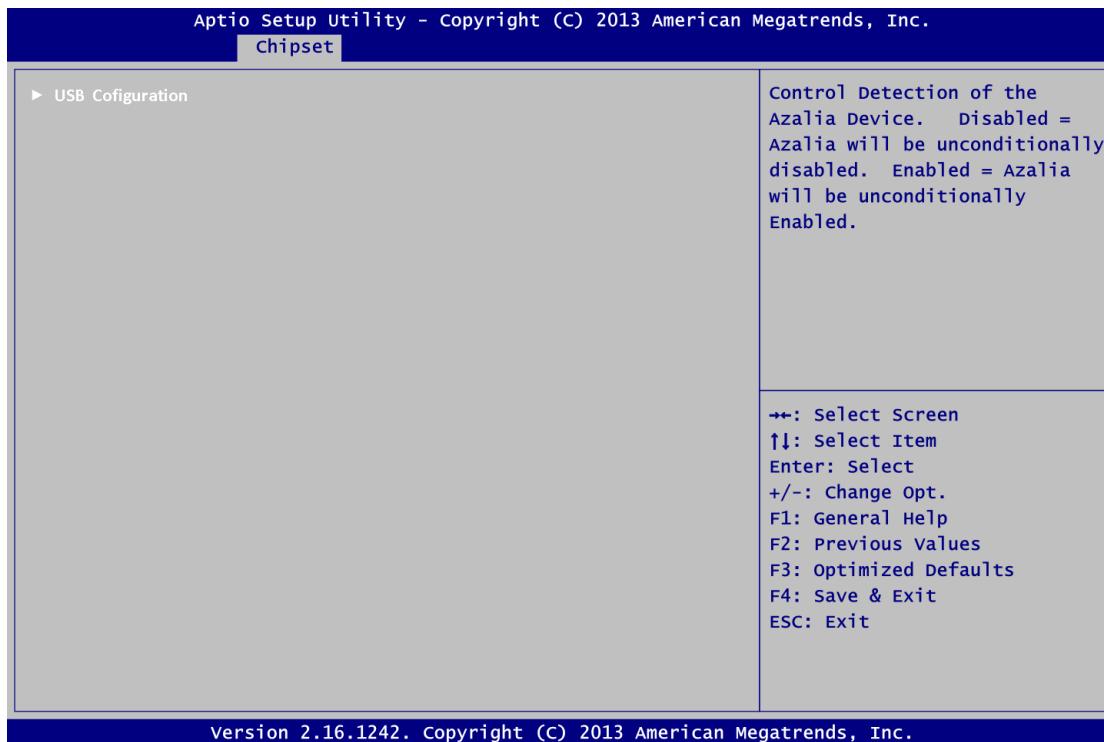


USB Configuration

Enabled or Disabled the setting for XHCI Mode.

Enabled or Disabled the setting for USB OTG Support.

4.6 Security Menu

The Security menu allows users to change the security settings for the system.

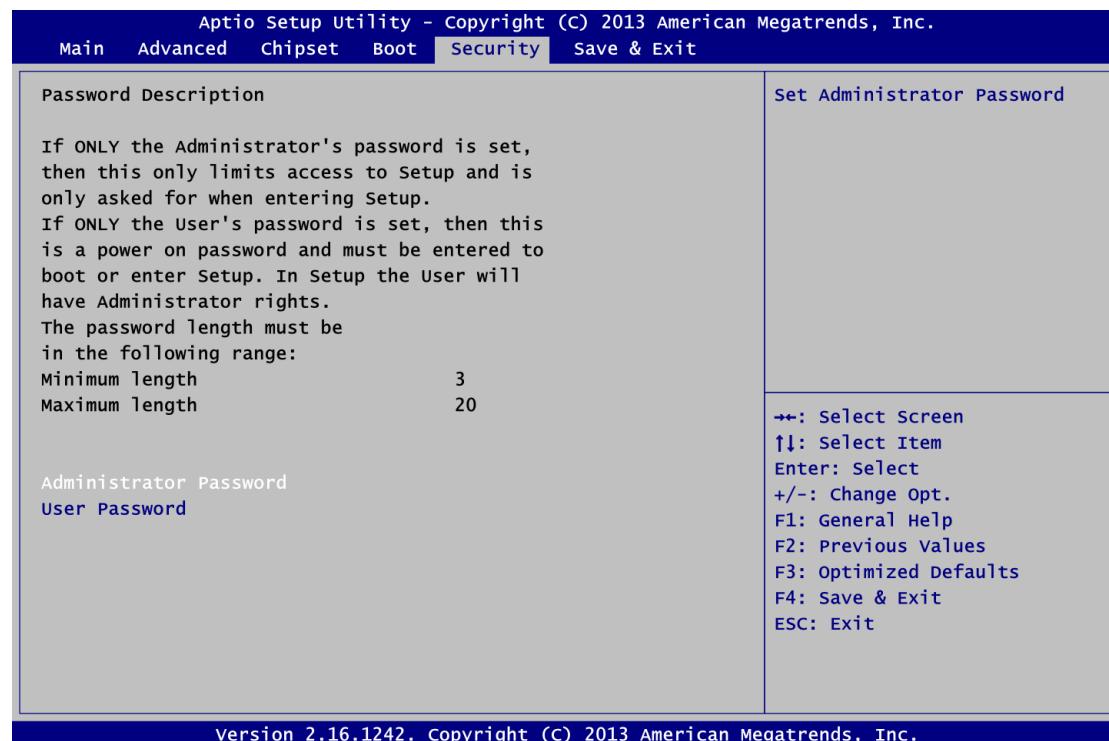

Administrator Password


This item indicates whether an administrator password has been set (installed or uninstalled).

User Password

This item indicates whether an user password has been set (installed or uninstalled).

4.7 Boot Menu

The Boot menu allows users to change boot options of the system.

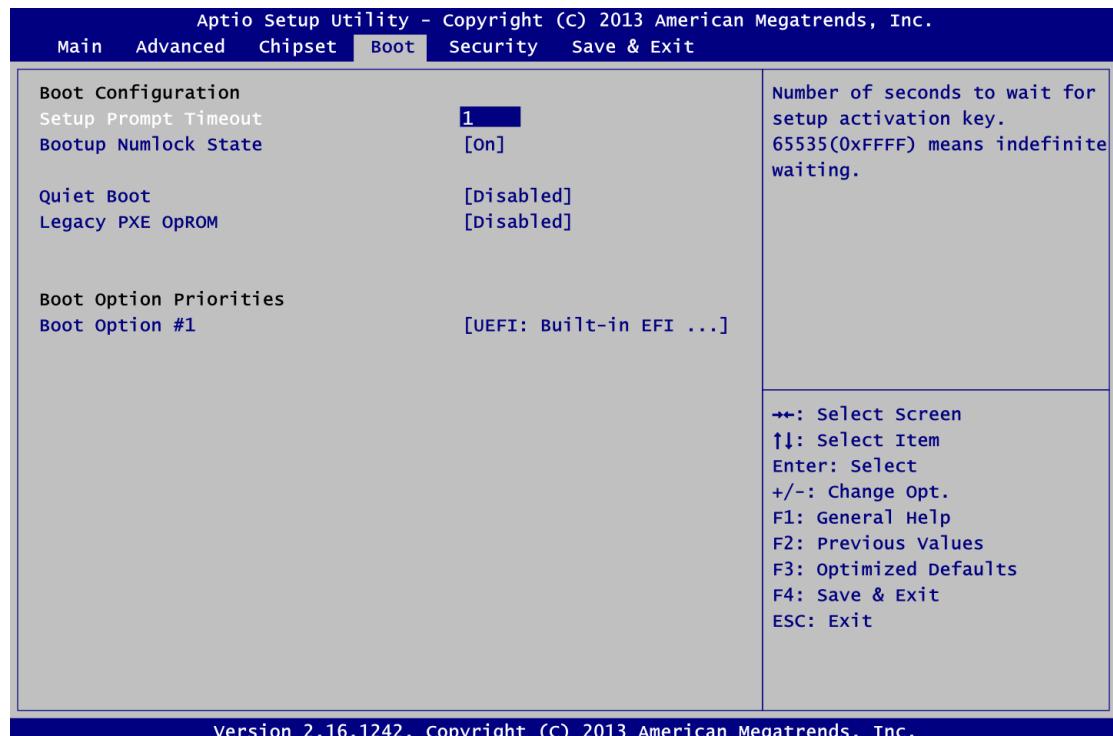

Setup Prompt Timeout

Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.

Bootup NumLock State

Use this item to select the power-on state for the keyboard NumLock.

Quiet Boot


Select to display either POST output messages or a splash screen during boot-up.

Boot Option Priorities

These are settings for boot priority. Specify the boot device priority sequence from the available devices.

4.8 Save & Exit Menu

The Save & Exit menu allows users to load your system configuration with optimal or fail-safe default values.

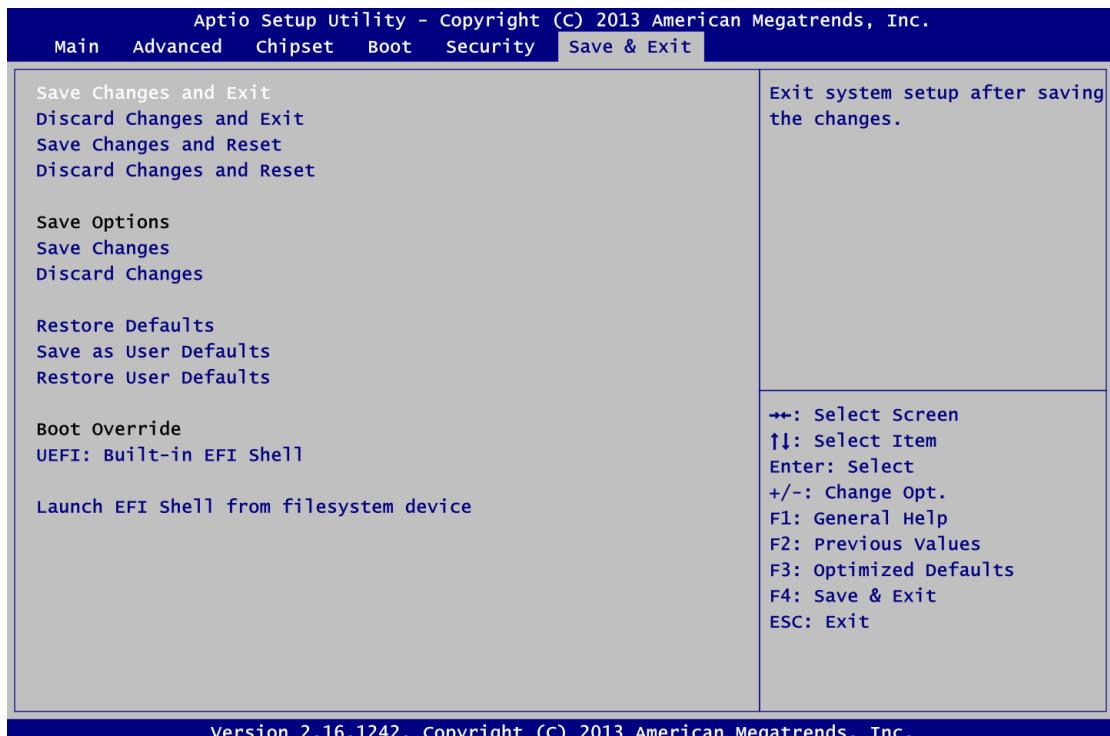

Save Changes and Exit

When you have completed the system configuration changes, select this option to leave Setup and return to Main Menu. Select Save Changes and Exit from the Save & Exit menu and press <Enter>. Select Yes to save changes and exit.

Discard Changes and Exit

Select this option to quit Setup without making any permanent changes to the system configuration and return to Main Menu. Select Discard Changes and Exit from the Save & Exit menu and press <Enter>. Select Yes to discard changes and exit.

Save Changes and Reset

When you have completed the system configuration changes, select this option to leave Setup and reboot the computer so the new system configuration parameters can take effect. Select Save Changes and Reset from the Save & Exit menu and press <Enter>. Select Yes to save changes and reset.

Discard Changes and Reset

Select this option to quit Setup without making any permanent changes to the system configuration and reboot the computer. Select Discard Changes and Reset from the Save & Exit menu and press <Enter>. Select Yes to discard changes and reset.

Save Changes

When you have completed the system configuration changes, select this option to save changes. Select Save Changes from the Save & Exit menu and press <Enter>. Select Yes to save changes.

Discard Changes

Select this option to quit Setup without making any permanent changes to the system configuration. Select Discard Changes from the Save & Exit menu and press <Enter>. Select Yes to discard changes.

Restore Defaults

It automatically sets all Setup options to a complete set of default settings when you select this option. Select Restore Defaults from the Save & Exit menu and press <Enter>.

Save as User Defaults

Select this option to save system configuration changes done so far as User Defaults. Select Save as User Defaults from the Save & Exit menu and press <Enter>.

Restore User Defaults

It automatically sets all Setup options to a complete set of User Defaults when you select this option. Select Restore User Defaults from the Save & Exit menu and press <Enter>.

Boot Override

Select a drive to immediately boot that device regardless of the current boot order.

Launch EFI Shell from filesystem device

Attempt to launch EFI Shell application (Shellx64.efi) from one of the available filesystem devices.

APPENDIX A WATCHDOG TIMER

About Watchdog Timer

After the system stops working for a while, it can be auto-reset by the watchdog timer. The integrated watchdog timer can be set up in the system reset mode by program.

How to Use Watchdog Timer

The following example enables configuration using debug tool.

Enable WDT

↓

Enable configuration:

O 2E 87 ; Un-lock super I/O

O 2E 87

↓

Select logic device:

O 2E 07

O 2F 08

↓

WDT device enable:

O 2E 30

O 2F 01

↓

Set timer unit:

O 2E F0

O 2F 00 ; (00: Sec; 08:Minute)

↓

Set base timer:

O 2E F1

O 2F 0A ; Set reset time (where 0A (hex) = 10sec)

Disable WDT

↓

Enable configuration:

O 2E 87 ; Un-lock super I/O

O 2E 87

↓

Select logic device:

O 2E 07

O 2F 08

↓

WDT device disable:

O 2E 30

O 2F 00